

# High-rate Space-Time-Frequency Codes Achieving Full-Diversity with Partial Interference Cancellation Group Decoding

BY MOON HO LEE, [\(IEEE MEMBERSHIP | SENIOR MEMBER, IEEE\)](#) AND YING GUO

Moon Ho Lee is with the Institute of Information and Communication, Chonbuk National University, Chonju 561-756, Korea. (e-mail: moonho@chonbuk.ac.kr).

Ying Guo is with School of Information Science and Engineering, Central South University, Changsha, 410083, China. (e-mail: sdguoying@gmail.com).

*July 16, 2018*

## Abstract

The partial interference cancellation (PIC) group decoding has recently been proposed to deal with the decoding complexity and code rate trade-off on the basis of space-time block code (STBC) design criterion when full diversity is achieved. It provides a framework to arrange the rate-complexity-performance tradeoff by choosing a suitable size of information symbol groups. In this paper, a simple design of a linear dispersive space-time-frequency (STF) code is proposed with a design criterion to achieve high rate for frequency-selective channels in terms of multipath when the PIC group decoding is applied at receiver. With an appropriate grouping scheme as well as the PIC group decoding, the proposed STF code is shown to obtain the similar diversity gain as the maximum likelihood (ML) decoding, namely full-dimensional sphere decoding, but have a low decoding complexity. It seems as an intermediate decoding between the ML receiver and zero-forcing (ZF) receiver. The proposed grouping design criterion for the PIC group decoding to achieve full diversity deploying the orthogonal-frequency-division multiplexing (OFDM) technique is also an intermediate condition between the loosest ML full rank criterion of codewords and the strongest ZF linear independence condition of the column vectors for the equivalent frequency-selective channel matrix. It can achieve full diversity with the PIC group decoding for any number of sub-carriers and the data rate can be made high. Several code design examples are illustrated for the feasibility of this coding scheme. Simulation results show that the proposed STF code can well address the rate-performance-complexity tradeoff of the multiple-input multiple-output orthogonal frequency division multiplexing (MIMO-OFDM) communication system.

# 1 Introduction

The next generation wireless communication systems are expected to support high-data-rate transmissions with high-quality services. The harsh wireless channels, including time-selective and frequency-selective fading channels, along with limited spectrum resources, have become dominating challenges for future wireless communication networks. To address these challenges, various remarkable breakthroughs in wireless communication networks have been witnessed in last decades. The multiple-input multiple-output (MIMO) technique has ever been viewed as one of great breakthrough solutions to increase the channel capacity, communication reliability and spectrum efficiency of wireless networks without requiring additional bandwidth. The eminent merits of MIMO system lie in its potential temporal diversity gain, spatial diversity gain and multiplexing gain to enhance link reliability. This elegant technique can be further exploited to explore the potential spatial and temporal diversity on flat-fading or frequency-selective channels with some proper transmission schemes, such as space-time (ST) coding [Alamouti99, Tarokh991, Tarokh04, Xia09], space-frequency (SF) coding [Zhang04, Gong04, Su04, Su05, Zhang05, Zhang07], and space-time-frequency (STF) coding [Gong526, GongLiu, Wang26, GSu526, Xia526]. It is shown that the coding gain and diversity can be simultaneously achieved with suitable coding schemes. Unfortunately, as the number of transmit antennas becomes large, the complexity of decoding increases, which makes the design of coding or modulating schemes difficult. When the channel state information (CSI) is available at the receiver, the full rank design criterion can be derived to achieve maximum diversity with the ML decoding. However, while achieving maximum diversity gain, the transmission rate may be reduced and the computational complexity of the ML receiver grows exponentially. Even though the quasi-orthogonal ST codes, SF/STF codes can support a higher transmission rate than orthogonal codes [Tarokh991], the diversity gain is not still made much large as a desirable outcome. It makes the ML decoding difficult for these codes while a great deal of information symbols are embedded in.

To solve the afore-mentioned problem of reducing the decoding complexity with a high rate, one may decode each symbol separately by placing a filter at the receiver to strength the main symbol while suppressing the interference symbols. One decoding approach called ZF decoding is designed to completely eliminate the interference symbols. Another is minimum mean square error (MMSE) decoding. The above decoding criterions based on ST coding or SF/STF coding design have attracted considerable attentions recently because they exploit gains of the efficiency and reliability of signal transmissions over MIMO systems with low-complexity receivers. The Alamouti code [Alamouti99] has the orthogonality structure so that it ensures symbol-by-symbol decoding equivalent to the ML decoding. The Toeplitz code [Zhang5] was proposed to achieve full diversity and high rate

with the ZF receiver. After that, The overlapped Alamouti code was proposed achieving full diversity with ZF or MMSE receivers [Shang5, Shang51, Shang52]. It is shown that for any orthogonal ST code, its ZF receiver has the similar performance as the ML receiver. Unfortunately, the rate of the linear receivers based on ST or SF codes is always upper bounded by one. To address the complexity and rate tradeoff, a partial interference cancellation (PIC) group decoding was proposed with the derived design criterion for ST codes [Xia09]. In essence, the PIC group decoding can be viewed as an intermediate decoding between the ML decoding and ZF decoding. A similar decoding algorithm as the PIC group decoding was suggested for the layered ST codes [Dai04]. After that, a systematic design of ST codes achieving full diversity with PIC group decoding was proposed for flat-fading channels [Zhang52]. The decoding complexity of the ST coding design is equivalent to the ML decoding complexity of multiple symbols. Unfortunately, the design of SF/STF codes achieving full diversity with PIC group decoding over frequency-selective channels still faces a challenge to handle the rate-performance-complexity tradeoff for MIMO-OFDM systems.

Recently, the OFDM technology has been recognized as one of the most efficient and effective techniques to deal with frequency-selective fading channels while achieving high speed data transmissions in broadband wireless networks. The increasing attraction of the OFDM technology is mainly due to how the system handles the multipath interferences at the receiver with practical implementation because of availability of the digital signal processor that makes the fast FFT affordable [Bingham5]. Its main idea is to split the high rate data stream into several lower rate streams and modulate them over a number of subcarriers. This technique provides a number of frequency-flat subcarriers within frequency-selective channels. In an OFDM scheme, a large number of orthogonal, overlapping, narrow-band subcarriers divide the available transmission bandwidth, which results in facile resource allocation [Letaief99]. Due to its simple implementation via the fast FFT, the OFDM technology has been widely adopted as a main physical layer solution in broadband access. In the light of superiority of the MIMO and OFDM techniques, the MIMO-OFDM technique is being pursued as a promising candidate for high data rate broadband wireless networks [Wang52, Lu52, Lu521, Lu522, Lu523, Lu524, Lu525, Lu526]. A systematic method for exploiting the available multipath or frequency diversity results in the rapid development of SF/STF codes for MIMO-OFDM systems. The first SF coding design criteria was presented in [Wang52]. This code makes full use of two dimensions of antennas and subcarriers to achieve a maximum diversity while the STF code exploits three dimensions of time, antennas and subcarriers to achieve an additional temporal diversity advantage superior to space and multipath diversity gain.

To exploit the spatial diversity gain provided by multiple antennas at transmitters and receivers, a great deal of SF coding schemes have been proposed for MIMO-OFDM systems [Zhang04, Gong04, Su04, Su05, Zhang05,

[Zhang07]. Consequently, several full-diversity SF codes have since been designed using linearly transformed data [Wang52, Lu52, Lu521, Lu522, Lu523, Lu524, Lu525, Lu526]. An SF coding scheme with transmission of cyclically shifted data from multi-antennas was suggested to achieve full diversity and optimal coding gain for sampled channels [Lu524]. However, its performance is not ensured to be optimal for such channels with arbitrary delay profiles. Then a particular SF coding design criterion was proposed on the basis of the available diversity without considering the effect of delay profiles for the sampled channels [Lu525]. Furthermore, the full rate SF codes were investigated for frequency selective channels under the assumption of the perfect knowledge of delay profile at the transmitter [Lu521]. Recently, the SF codes asymptotically achieving the Gilbert-Varshamov bound have been investigated [Liu526]. These codes can obtain a target diversity gain but the decoding complexities grow exponentially with the desired diversity. Therefore, how to address the rate-diversity-complexity tradeoff of the SF coding schemes for frequency-selective channels is still a retained problem.

It is known an SF code can achieve link-reliability within only one OFDM block. However, the temporal dimension may also be exploited for multiple OFDM blocks. This leads to the STF code that can achieve the maximum diversity gain over MIMO-OFDM system. The first STF code was proposed for two antennas [Gong526] and then developed [GongLiu, Wang26]. For these STF codes, all channels were assumed to be constant. However, for constant channels they do not offer any temporal diversity, and performance gains are always obtained at a high complexity. In [GSu526], a performance criteria for the STF code was derived with the ML decoding. However, the maximization coding gain was not considered. In the recent work [Xia526], a high rate STF code has been presented, but it was not optimized in terms of coding gain. Late on, a quasi-orthogonal STF code was proposed with the reduced ML decoding complexity to improve the symbol rate at the tradeoff of the high decoding complexity. Because of this partial orthogonal structure, the quasi-orthogonal STF code can be decoded with the ML pair-by-pair complex symbols, which has a higher decoding complexity compared to the orthogonal STF code. As will be shown later in this paper, the aforementioned decoding is a special case of the PIC group decoding which is an intermediate decoding between the ML decoding and ZF (or MMSE) decoding. The design of SF/STF codes achieving full diversity with PIC group decoding can handle the well rate-performance-complexity tradeoff for MIMO-OFDM systems.

The following characteristics are summarized for some existing SF/STF coding schemes.

1. The complexity of a decoder is largely independent of number of subcarriers and receive antennas. It guarantees full diversity for an arbitrary number of transmit antennas with any memoryless modulation approaches in terms of the ML receiver or ZF/MMSE receiver;

2. They have ability to exploit the spatial, frequency and even temporal diversity without any information of channel at transmitter.
3. The design coding approach offers a high transmission rate achieving full-diversity and optimal-coding gain without considering the decoding complexity of the receiver.

The above viewpoints propel us to design such SF/STF coding schemes with the linear receiver. Towards this end, the specific coding schemes [Xia09, Zhang52] raise several problems, which also serve as a motivation for our present work.

1. Are there other SF/STF codes exploiting full-diversity with high rate for frequency-selective channels? If so, how do such codes compare with the existing SF/STF codes in terms of the pairwise error probability (PEP) performance and decoding-complexity?
2. When perfect channel information is not available at the transmitter, can a full-diversity SF/STF code having a high-coding gain be designed with a low-complexity receiver?

These problems actuate us to explore the design of SF/STF codes achieving full-diversity with the PIC group decoding for frequency-selective channels.

In this paper, we address the afore-mentioned problems by deriving a family of SF/STF codes with the PIC group decoding which can simultaneously achieve high transmission rate, full diversity and low-complexity decoding. The main contributions of this paper can be summarized as follows.

- A simple SF/STF coding scheme is explicitly designed on the basis of the PIC group decoding for a family of linear dispersion codes. We provide a unified PIC decoding structure that decodes the information symbols embedded in SF/STF codes while dividing them into several suitable groups and decoding each group separately via a linear PIC operation. It can be viewed as an intermediate decoding between the ML decoding and ZF decoding. The PIC group decoding for frequency-selective channels provides a framework to adjust the complexity-performance tradeoff by choosing suitable sizes of information symbol groups corresponding to its equivalent channel matrix.
- A design criteria for the SF/STF code achieving full diversity is established. The proposed design criterion is an intermediate criterion between the ML full rank criterion of codewords and the ZF linear independence criterion of column vectors in the equivalent channel matrix. It therefore provides a pretty rate-performance-complexity tradeoff. We pursue such a unified approach for the design of the SF/STF codes where the SF code can be regarded as a special case of the STF code. Also, we illustrate the value of the STF code design while taking the multi-block quality into account.

- A problem of the SF/STF code structure is addressed for MIMO-OFDM systems. We suggest a systematic approach for the design of full-diversity SF/STF codes with the PIC group decoding. These codes are designed with the multiple-diagonal-layer structure and thus achieve full diversity with high transmission rate, but have low-complexity decoding.
- Motivated from the conditional detection [Sezginer526, Sirianunpiboonr526], we suggest a conditional PIC group decoding concept for the SF/STF code that can not satisfy the conventional PIC group decoding criteria, but can be similarly decoded with low complexity. For the conditional PIC group decoding, we select each trial of a fixed group of information symbols, and then decode the remaining symbols with the conventional PIC group decoding. The final decoding results are the optimal solution among all trials of the fixed group of symbols with the ML decoding. Consequently, we obtain another design criterion for the SF/STF code with high rate that achieves the similar full diversity as that of the PIC group decoding.

This paper is organized as follows. In Section II, we describe the channel model and system model for MIMO-OFDM systems with the PIC group decoding. In Section III, we systematically study the diversity property of the SF/STF codes with the PIC group decoding, and derive the design criterion for the SF/STF codes. In Section VI, we present several design examples to illustrate the feasibility of the STF coding design criteria with some simulation results. Finally, conclusions are drawn in Section V.

Some notations are defined throughout this paper as follows:

- $\mathbb{C}$ : complex number field;
- $\mathcal{A}$ : a signal constellation;
- $\text{tr}$ : trace of a matrix;
- Bold faced upper-case letters, such as  $\mathbf{A}$ : matrices;
- Bold faced lower-case letters, such as  $\mathbf{a}$ : column vectors;
- Superscripts  $(\cdot)^{\langle \text{mathrm} \rangle T}$ ,  $(\cdot)^{\langle \text{mathrm} \rangle H}$ , and  $(\cdot)^*$ : transpose, complex conjugate transpose, complex conjugate, respectively;
- $\|\cdot\|_{\langle \text{mathrm} \rangle F}$ : Frobenius norm of a matrix;
- $E[x]$ : expectation of variable  $x$ ;

- $\otimes$ : the Kronecker product;
- $\mathbf{I}_n$ : identity matrix of size  $n \times n$ ;
- $\text{diag}(\mathbf{d}_0 \cdots \mathbf{d}_{N-1})$ : a diagonal matrix with diagonal entries  $\mathbf{d}_0 \cdots \mathbf{d}_{N-1}$ .

## 2 MIMO-OFDM System and PIC Group Decoding over Block-Fading Channels

### 2.1 Channel Model

We consider an MIMO-OFDM system with  $M_t$  transmit antennas,  $M_r$  receive antennas. Each transmit antenna deploys an OFDM modulator with  $N$  sub-carriers. Suppose that the receiver has perfect channel knowledge but no knowledge at the transmitter since training sequences are typically available. The MIMO channels experience block frequency-selective fading simultaneously induced by  $L$  independent channel taps between each pair of transmit and receive antennas. The path gains between each pair of transmit and receive antennas are constant over each fading block period, but may be independent from one fading block to another. Each OFDM symbol is transmitted during only one fading block. The channel impulse response from transmit antenna  $i$  to receive antenna  $j$  during the  $k^{th}$  fading block is given by

$$h_{i,j}^k(\tau) = \sum_{l=0}^{L-1} \alpha_{i,j}^k(l) \delta(\tau - \tau_l), \quad (1)$$

where  $\tau_l$  is the delay of the  $l^{th}$  channel tap, and  $\alpha_{i,j}^k(l)$  denotes the complex amplitude of the  $l^{th}$  channel tap from transmit antenna  $i$  to receive antenna  $j$ . The complex amplitude  $\alpha_{i,j}^k(l)$  is modelled as a zero-mean, complex Gaussian random variable with variance  $E(|\alpha_{i,j}^k(l)|^2) = \delta_l^2$  for any given  $(i, j, k, l)$ , where  $i \in \{1, \dots, M_t\}$ ,  $j \in \{1, \dots, M_r\}$ ,  $k \in \{1, \dots, M_b\}$ , and  $l \in \{0, \dots, L-1\}$ . The powers of  $L$  independent channel taps are normalized such that  $\sum_{l=0}^{L-1} \delta_l^2 = 1$ . According to (1), the fading coefficient for the  $n^{th}$  subcarrier between transmit antenna  $i$  and receive antenna  $j$  for frequency response of the channel is then given by

$$H_{i,j}^k(n) = \sum_{l=0}^{L-1} \alpha_{i,j}^k(l) e^{-j2\pi n \Delta_f \tau_l}, \quad (2)$$

where  $\iota = \sqrt{-1}$ ,  $\Delta_f$  denotes the inter-subcarrier spacing,  $\tau_l = l T_s$  represents the  $l^{th}$  path delay, and  $T_s = (N \Delta_f)^{-1}$  is the sampling interval of OFDM system. We assume that no spacial fading correlation exists between antennas, i.e., channel taps  $\alpha_{i,j}^k(l)$  are independent for any different indices  $(i, j, k, l)$ .

Denote  $\mathbf{h}_{i,j}^k = (\alpha_{i,j}^k(0), \alpha_{i,j}^k(1), \dots, \alpha_{i,j}^k(L-1)) \langle \text{mathrm} \rangle T$  and  $\mathbf{H}_{i,j}^k = (H_{i,j}^k(0), H_{i,j}^k(1), \dots, H_{i,j}^k(N-1)) \langle \text{mathrm} \rangle T$ , respectively. Thus the frequency response of the channel is given by

$$\mathbf{H}_{i,j}^k = \mathbf{F} \mathbf{h}_{i,j}^k, \quad (3)$$

where matrix  $\mathbf{F}$  is given by

$$\mathbf{F} = [\mathbf{f}^{\tau_0}, \mathbf{f}^{\tau_1}, \dots, \mathbf{f}^{\tau_{L-1}}] \quad (4)$$

$$= \begin{bmatrix} 1 & 1 & \dots & 1 \\ \xi^{\tau_0} & \xi^{\tau_1} & \dots & \xi^{\tau_{L-1}} \\ \xi^{2\tau_0} & \xi^{2\tau_1} & \dots & \xi^{2\tau_{L-1}} \\ \vdots & \vdots & \vdots & \vdots \\ \xi^{(N-1)\tau_0} & \xi^{(N-1)\tau_1} & \dots & \xi^{(N-1)\tau_{L-1}} \end{bmatrix}, \quad (5)$$

where  $\xi = e^{-2\pi\iota/T_s}$ . Consequently, the correlation matrix of the channel frequency response from transmit antenna  $i$  to receive antenna  $j$  during the  $k^{th}$  fading block can be calculated as

$$R_{i,j}^k = E \{ \mathbf{H}_{i,j}^k [\mathbf{H}_{i,j}^k] \langle \text{mathrm} \rangle H \} \quad (6)$$

$$= \mathbf{F} E \{ \mathbf{h}_{i,j}^k [\mathbf{h}_{i,j}^k] \langle \text{mathrm} \rangle H \} \mathbf{F} \langle \text{mathrm} \rangle H \quad (7)$$

$$= \mathbf{F} \text{diag}(\delta_0^2, \delta_1^2, \dots, \delta_{L-1}^2) \mathbf{F} \langle \text{mathbf} \rangle H. \quad (8)$$

In this paper, it is assumed that  $R_{i,j}^{k_1} = R_{i,j}^{k_2} = R$ ,  $\forall k_1, k_2 \in \{1, \dots, M_b\}$ , for each pair of transmit and receive antennas with parameters  $(i, j)$ .

## 2.2 System Model

Suppose the information source generate  $\eta$  information symbols from discrete alphabet  $\mathcal{A}$ , which are  $q$ -ary quadrature amplitude modulation (QAM) or pulse amplitude modulation (PAM) symbols normalized into the unit power. Deploying a mapping  $f: \mathbf{x} \mapsto \mathbf{C}$ , an arbitrary information symbol vector  $\mathbf{x} = [x_0 x_1 \dots x_{\eta-1}] \langle \text{mathrm} \rangle T \in \mathcal{A}^\eta$  is encoded a code matrix  $\mathbf{C} \in \mathbb{C}^{NM_b \times M_t}$  given by

$$\mathbf{C} = [\mathbf{C}_1 \langle \text{mathrm} \rangle T \mathbf{C}_2 \langle \text{mathrm} \rangle T \dots \mathbf{C}_{M_b} \langle \text{mathrm} \rangle T] \langle \text{mathrm} \rangle T, \quad (9)$$



where matrix  $\mathbf{C}_k = [\mathbf{c}_1^k \mathbf{c}_2^k \cdots \mathbf{c}_{M_t}^k]$ ,  $\forall k \in \{1, 2, \dots, M_b\}$ , of size  $N \times M_t$  represents the subcodeword, an SF codeword, ready to be sent during the  $k^{th}$  fading block. The  $k^{th}$  subcodeword  $\mathbf{C}_k \in \mathbb{C}^{N \times M_t}$  is represented by

$$\mathbf{C}_k = \begin{bmatrix} c_1^k(0) & c_2^k(0) & \cdots & c_{M_t}^k(0) \\ c_1^k(1) & c_2^k(1) & \cdots & c_{M_t}^k(1) \\ \vdots & \vdots & \ddots & \vdots \\ c_1^k(N-1) & c_2^k(N-1) & \cdots & c_{M_t}^k(N-1) \end{bmatrix}, \quad (10)$$

where  $c_i^k(n)$  is the data transmitted by the  $i^{th}$  transmit antenna at the  $n^{th}$  frequency subcarrier during the  $k^{th}$  OFDM symbol duration. The  $i^{th}$  column  $\mathbf{c}_i^k$  of size  $N \times 1$  is sent at the  $i^{th}$  transmit antenna,  $\forall i \in \{1, 2, \dots, M_t\}$ . An STF codeword has an additional time dimension added to the above mentioned SF codeword in (10), which can be represented, as an example for  $M_b = 2$ ,

$$\mathbf{C}_{\text{STF}} = [\mathbf{C}_k^{\langle \text{mathrm} \rangle T} \mathbf{C}_{k+1}^{\langle \text{mathrm} \rangle T}]^{\langle \text{mathrm} \rangle T} \in \mathbb{C}^{2N \times M_t}.$$

Thus the proposed code  $\mathbf{C}$  in (9) is the generalized STF codeword in essence. We assume the STF code  $\mathbf{C}$  satisfy the energy constraint  $E(\|\mathbf{C}\|_{\langle \text{mathrm} \rangle}^2) = NM_b M_t$ .

The OFDM transmitter performs an  $N$ -point inverse fast Fourier transform (IFFT) modulation over the frequency tones. To remove the inter symbol interference caused by the multipath delay of channels, one needs to insert a cyclic prefix (CP) to each OFDM symbol. After that, OFDM symbols are launched into the propagation environment from transmit antennas simultaneously.

At the receiver, suppose that the perfect synchronization is available. After removing the CP and applying fast Fourier transform (FFT) demodulation, the received signal at the  $j^{th}$  receive antenna for the  $n^{th}$  frequency subcarrier during the  $k^{th}$  OFDM symbol duration is given by

$$Y_j^k(n) = \sqrt{\frac{\rho}{M_t}} \sum_{i=1}^{M_t} c_i^k(n) H_{i,j}^k(n) + N_j^k(n), \quad (11)$$

where  $\rho$  is the average signal-to-noise ratio (SNR) at each receive antenna, and  $N_j^k(n)$  is a zero-mean circularly symmetric complex Gaussian random variable vector with unit variance corresponding to the  $n^{th}$  frequency subcarrier. Using the notations  $c_i^k(n) = c_i[(k-1)N+n]$ ,  $H_{i,j}^k(n) = H_{i,j}[(k-1)N+n]$ ,  $N_j^k(n) = N_j[(k-1)N+n]$ , and  $Y_j^k(n) = Y_j[(k-1)N+n]$ ,  $\forall k \in \{1, \dots, M_b\}$ ,  $n \in \{0, 1, \dots, N-1\}$ ,  $i \in \{1, \dots, M_t\}$ , and  $j \in \{1, \dots, M_r\}$ , the received signals can be rewritten as

$$Y_j(m) = \sqrt{\frac{\rho}{M_t}} \sum_{i=1}^{M_t} c_i(m) H_{i,j}(m) + N_j(m), \quad (12)$$

$\forall m \in \{0, 1, \dots, NM_b - 1\}$ , where  $M_b$  denotes the minimum of the coherence time of channels. Taking the notation  $D_i = \text{diag}\{c_i(0), \dots, c_i(NM_b - 1)\}$ , we design an  $NM_r M_b \times NM_r M_t M_b$  matrix  $\mathbf{X}$  from the STF codeword  $\mathbf{C}$  in (9) as

$$\mathbf{X} = \mathbf{I}_{M_r} \otimes [D_1 D_2 \dots D_{M_t}]. \quad (13)$$

Moreover, we denote channel vector  $\mathbf{h}$  of size  $NM_t M_r M_b \times 1$  as

$$\mathbf{h} = [H_{1,1}^{(\text{mathrm})} T \dots H_{M_t,1}^{(\text{mathrm})} T \dots H_{1,M_r}^{(\text{mathrm})} T \dots H_{M_t,M_r}^{(\text{mathrm})} T]^{(\text{mathrm})} T, \quad (14)$$

where  $H_{i,j} = [H_{i,j}(0) \dots H_{i,j}(NM_b - 1)]^{(\text{mathrm})} T$ . The received signal vector  $\mathbf{Y}$  is denoted by  $\mathbf{Y} = [Y_1(0) \dots Y_1(NM_b - 1) \dots Y_{M_r}(0) \dots Y_{M_r}(NM_b - 1)]^{(\text{mathrm})} T$ , and the noise vector  $\mathbf{N}$ , the additive complex Gaussian noise with zero mean and unit variance of size  $NM_r M_b \times 1$ , is represented as  $\mathbf{N} = [N_1(0) \dots N_1(NM_b - 1) \dots N_{M_r}(0) \dots N_{M_r}(NM_b - 1)]^{(\text{mathrm})} T$ . After some permutations of matrices and vectors, the received signals  $Y_j$  in (12) can be rewritten in matrix format given by

$$\mathbf{Y} = \sqrt{\frac{\rho}{M_t}} \mathbf{X} \mathbf{h} + \mathbf{N}. \quad (15)$$

Actually, while taking  $\mathbf{F}_l = \text{diag}(\mathbf{f}^l)$  and  $\alpha_j^k(l) = [\alpha_{1,j}(l), \dots, \alpha_{M_t,j}(l)]^{(\text{mathrm})} T$ ,  $\forall l \in \{0, 1, \dots, L - 1\}$  and using notations  $\mathbf{X}'_k = (\mathbf{F}_0 \mathbf{C}_k \dots \mathbf{F}_{L-1} \mathbf{C}_k)$  and  $\alpha_j^k = [(\alpha_j^k(0))^{(\text{mathrm})} T \dots (\alpha_j^k(L-1))^{(\text{mathrm})} T]^{(\text{mathrm})} T$ , the system in (15) can be equivalent to

$$\mathbf{Y} = \sqrt{\frac{\rho}{M_t}} \mathbf{X}' \mathbf{h}' + \mathbf{N}, \quad (16)$$

where  $\mathbf{X}' = \mathbf{I}_{M_r} \otimes \text{diag}(\mathbf{X}'_1 \dots \mathbf{X}'_{M_b})$  and  $\mathbf{h}' = [(\alpha_1^1)^{(\text{mathrm})} T \dots (\alpha_1^{M_b})^{(\text{mathrm})} T \dots (\alpha_{M_r}^1)^{(\text{mathrm})} T \dots (\alpha_{M_r}^{M_b})^{(\text{mathrm})} T]^{(\text{mathrm})} T$ .

Assume the path gains  $\alpha_{i,j}^k(l)$  are independent for different paths  $l$ , transmit antenna  $i$ , receive antenna  $j$ , and fading block  $k$ . Then the block (temporal) correlation is defined as  $r_b(m) = E\{\alpha_{i,j}^k(l)(\alpha_{i,j}^{k+m}(l))^*\}$ ,  $\forall m, k \in \{1, 2, \dots, M_b\}$ . Using notation  $\mathbf{a}_{i,j} = [\alpha_{i,j}^1(0) \dots \alpha_{i,j}^1(L-1) \dots \alpha_{i,j}^{M_b}(0) \dots \alpha_{i,j}^{M_b}(L-1)]^{(\text{mathrm})} T$ , we have the correlation matrix  $E(\mathbf{a}_{i,j} \mathbf{a}_{i,j}^{(\text{mathrm})} H) = R_b \otimes \text{diag}\{\delta_0^2, \dots, \delta_{L-1}^2\}$ , where  $R_b = (r_{p,q})_{M_b \times M_b}$  is the temporal correlation matrix, each entry  $r_{p,q}$  calculating from  $r_{p,q} = r_b(q - p) \forall p, q \in \{1, \dots, M_b\}$ . For the channel vector  $\mathbf{h}$  of size  $NM_t M_r M_b \times 1$ , the correlation matrix  $\mathbf{R}$  of size  $NM_t M_r M_b \times NM_t M_r M_b$  is formatted by

$$\mathbf{R} = \text{diag}\{R_{1,1} \dots R_{M_t,1} \dots R_{1,M_r} \dots R_{M_t,M_r}\} \quad (17)$$

$$= \mathbf{I}_{M_t M_r} \otimes (R_b \otimes R). \quad (18)$$

Suppose  $\mathbf{X}$  and  $\tilde{\mathbf{X}}$  of size  $N M_b M_r \times N M_b M_r M_t$  are two matrices corresponding to codewords  $\mathbf{C}$  and  $\tilde{\mathbf{C}}$  of size  $N M_b \times M_t$ . The pairwise error probability (PEP) between  $\mathbf{X}$  and  $\tilde{\mathbf{X}}$  is given by

$$\mathcal{P}(\mathbf{X} \rightarrow \tilde{\mathbf{X}}) = P(\|\mathbf{Y} - \mathbf{X}\mathbf{h}\|_{(\text{mathrm})}^2 > \|\mathbf{Y} - \tilde{\mathbf{X}}\mathbf{h}\|_{(\text{mathrm})}^2 | \mathbf{X} \text{ send}) \quad (19)$$

$$= P((\Delta\mathbf{X}\mathbf{h} + \mathbf{N})_{(\text{mathrm})}^H (\Delta\mathbf{X}\mathbf{h} + \mathbf{N}) < \mathbf{N}_{(\text{mathrm})}^H \mathbf{N} | \mathbf{X} \text{ send}) \quad (20)$$

where  $\Delta\mathbf{X} = \mathbf{X} - \tilde{\mathbf{X}}$ .

Using notations  $\Delta\mathbf{C} = \mathbf{C} - \tilde{\mathbf{C}}$  and  $\Delta\mathbf{D}_i = \mathbf{D}_i - \tilde{\mathbf{D}}_i, \forall i \in \{1, \dots, M_t\}$ , matrix  $\Delta\mathbf{X}\mathbf{R}\Delta\mathbf{X}_{(\text{mathrm})}^H$  can be represented as

$$\Delta\mathbf{X}\mathbf{R}\Delta\mathbf{X}_{(\text{mathrm})}^H = I_{M_r} \otimes \left( \sum_{i=1}^{M_t} \Delta\mathbf{D}_i (R_b \otimes R) \Delta\mathbf{D}_i_{(\text{mathrm})}^H \right) \quad (21)$$

$$= I_{M_r} \otimes [(\Delta\mathbf{C}\Delta\mathbf{C}_{(\text{mathrm})}^H) \circ (R_b \otimes R)], \quad (22)$$

where  $\circ$  denotes Hadamard product. Let

$$\mathbf{W} = \begin{bmatrix} \Delta\mathbf{X}\mathbf{R}\Delta\mathbf{X}_{(\text{mathrm})}^H + \mathbf{I}_{NM_b M_r} & -\mathbf{I}_{NM_b M_r} \\ \mathbf{I}_{NM_b M_r} & -\mathbf{I}_{NM_b M_r} \end{bmatrix},$$

then the characteristic function is given by

$$\Phi_{(\text{mathbfbf})}(\mathbf{C}(t)) = E(e^{\iota Q t}) = \frac{1}{\det(\mathbf{I}_{2NM_b M_r} - \iota t \mathbf{W})}. \quad (23)$$

where  $Q = (\Delta\mathbf{X}\mathbf{h} + \mathbf{N})_{(\text{mathrm})}^H (\Delta\mathbf{X}\mathbf{h} + \mathbf{N}) - \mathbf{N}_{(\text{mathrm})}^H \mathbf{N}$ . Thus the PEP between  $\mathbf{X}$  and  $\tilde{\mathbf{X}}$  can be upper bounded by [Sirianunpiboonr52011]

$$\mathcal{P}(\mathbf{X} \rightarrow \tilde{\mathbf{X}}) = \frac{1}{2\pi} \int_{-\infty}^0 \int_{-\infty}^{+\infty} \Phi_{(\text{mathbfbf})}(\mathbf{C}(t)) e^{-\iota x t} dx dt \quad (24)$$

$$\leq \left[ \frac{2\kappa M_r - 1}{\kappa M_r} \right] \left[ \prod_{i=1}^{\kappa} \lambda_i \right]^{-M_r} \left[ \frac{\rho}{M_t} \right]^{-\kappa M_r} \quad (25)$$

where  $\lambda_i$  denotes the  $i^{th}$  nonzero eigenvalue of  $(\Delta\mathbf{C}\Delta\mathbf{C}_{(\text{mathrm})}^H) \circ (R_b \otimes R)$ , and  $\kappa$  denotes the number of nonzero eigenvalues or the rank of the Hadamard product matrix  $(\Delta\mathbf{C}\Delta\mathbf{C}_{(\text{mathrm})}^H) \circ (R_b \otimes R)$ .

Thus there are two STF code design criterions [Lu522, Lu523] described as follows.

1. Diversity (rank) criterion: the minimum rank of  $(\Delta\mathbf{C}\Delta\mathbf{C}_{(\text{mathrm})}^H) \circ (R_b \otimes R)$  should be as large as possible for all pairs of codewords  $\mathbf{C}$  and  $\tilde{\mathbf{C}}$ .

2. Product (gain) criterion: the minimum value of product  $\prod_{i=1}^{\kappa} \lambda_i$  should be maximized as large as possible for all pairs of codewords  $\mathbf{C}$  and  $\tilde{\mathbf{C}}$ .

It is necessary to note that since rank of  $\Delta \mathbf{C} \Delta \mathbf{C}^{\langle \text{mathrm} \rangle} H$  is at most  $M_t$  and rank of  $R$  is at most  $L$ , we have

$$\text{Rank}[(\Delta \mathbf{C} \Delta \mathbf{C}^{\langle \text{mathrm} \rangle} H) \circ (R_b \otimes R)] \leq \min \{L M_t \text{Rank}(R_b), N M_b\}, \quad (26)$$

which is a result of the rank inequalities on the Hadamard product and tensor product.

### 2.3 PIC Group Decoding Algorithm

The rule mapping information symbols to the SF/STF codewords is usually the one that minimizes the error probability for given codes. Without utilizing any design structures, it seems difficult to decode the SF/STF codes due to the significant complexity and storage requirements that grow with larger rates. To overcome these difficulties, information symbols  $x_v \in \mathcal{A}$ ,  $\forall v \in \{1, \dots, \eta\}$  are assumed to be encoded by the linear dispersion STF codes in which codewords are a linear function of data symbols with the canonical decomposition

$$\mathbf{X} = \sum_{v=1}^{\eta} (x_v \mathbf{A}_v + x_v^* \mathbf{B}_v), \quad (27)$$

where  $\mathbf{A}_v, \mathbf{B}_v \in \mathbb{C}^{NM_r M_b \times NM_t M_r M_b}$  are constant matrices called dispersion matrices. The key to the linear dispersion STF code design is that the basis matrices  $\{(\mathbf{A}_v, \mathbf{B}_v): v \in \{1, \dots, \eta\}\}$  are chosen such that the resulting codes can maximize the ergodic capacity of the equivalent MIMI-OFDM system and hence provide good performance in terms of error probability. In this paper, we only consider the codeword  $\mathcal{X}$  generated from a simple linear dispersion STF code defined as  $\mathbf{X} = \sum_{v=1}^{\eta} x_v \mathbf{A}_v$ , i.e.,

$$\mathcal{X} \triangleq \{\mathbf{X} = \sum_{v=1}^{\eta} x_v \mathbf{A}_v: x_v \in \mathcal{A}, v \in \{1, \dots, \eta\}\}. \quad (28)$$

In a case that the complex conjugated information symbols are involved, it can be converted into the form in (28) if the real and imaginary parts are represented as two independent variables. Assuming  $\mathbf{E}[x_n] = 0$  and  $\mathbf{E}[|x_n|^2] = 1$ , the basis matrices should satisfy the power constraint  $\text{tr}(\sum_{v=1}^{\eta} \mathbf{A}_v \mathbf{A}_v^{\langle \text{mathrm} \rangle} H) = N M_b$ . It is known that the SF/STF code is fully determined by the set of codeword matrices  $\mathbf{A}_v$  that can be identified by transmitter and receiver.

In order to decode the transmitted symbol vector  $\mathbf{x} = (x_1, \dots, x_\eta)$   $T \in \mathcal{A}^\eta$  at the receiver, we need to extract  $\mathbf{x}$  from the codeword  $\mathbf{X}$  using the PIC group decoding algorithm. Substituting  $\mathbf{X}$  in (15) with a simple linear dispersion STF code expressed in (28), we have

$$\mathbf{Y} = \sqrt{\frac{\rho}{M_t}} \sum_{v=1}^{\eta} \mathbf{A}_v \mathbf{h} x_v + \mathbf{N} \quad (29)$$

$$= \sqrt{\frac{\rho}{M_t}} (\mathbf{A}_1 \mathbf{h}, \dots, \mathbf{A}_\eta \mathbf{h}) \mathbf{x} + \mathbf{N} \quad (30)$$

$$= \sqrt{\frac{\rho}{M_t}} \mathcal{H}(\mathbf{h}) \mathbf{x} + \mathbf{N}, \quad (31)$$

where  $\mathbf{Y}$  is the received signal vector of size  $N M_r M_b \times 1$ ,  $\mathcal{H}(\mathbf{h}) = (\mathbf{A}_1 \mathbf{h}, \dots, \mathbf{A}_\eta \mathbf{h})$  is an equivalent channel matrix of size  $N M_r M_b \times \eta$ , and  $\mathbf{N}$  is the additive white Gaussian noise vector of size  $N M_r M_b \times 1$ . Since the decoding complexity grows with increasing  $\eta$ , it is sufficient to take  $\eta = N M_b M_t$  to achieve full capacity of MIMO-OFDM channels given by

$$C_{\langle \mathbf{H} \rangle} = \mathbf{E}_{\langle \mathbf{H} \rangle} \text{Hlog det}(\mathbf{I}_{M_r} + \frac{\rho}{M_t} \mathbf{H} \mathbf{H}^{\langle \mathbf{H} \rangle}),$$

where the selection of input distribution which maximizes the mutual information is circular complex Gaussian with covariance  $1 / (N M_b M_t) \mathbf{I}_{N M_b M_t}$ .

Let us define the index set  $\mathcal{I} = \{1, 2, \dots, \eta\}$ , where  $\eta$  represents the number of information symbols in  $\mathbf{x}$ . The set  $\mathcal{I}$  is then partitioned into  $P$  subsets, i.e.,  $\mathcal{I} = \{\mathcal{I}_p; 1 \leq p \leq P\}$  with

$$\mathcal{I}_p \triangleq \{i_{p,1}, \dots, i_{p,\eta_p}\}$$

such that  $\mathcal{I} = \bigcup_{p=1}^P \mathcal{I}_p$  and  $\sum_{p=1}^P \eta_p = \eta$ , where  $\eta_p$  denotes the cardinality of subset  $\mathcal{I}_p$ . We define  $\mathbf{x}_{\mathcal{I}_p}$  as the information symbols with indices in  $\mathcal{I}_p$ , i.e.,

$$\mathbf{x}_{\mathcal{I}_p} \triangleq [x_{i_{p,1}} \dots x_{i_{p,\eta_p}}]^T.$$

In this case the STF code  $\mathbf{X}$  in (28) can be represented as  $\mathbf{X}(\mathbf{x}) \triangleq \mathbf{X}(\mathbf{x}_{\mathcal{I}_1}, \dots, \mathbf{x}_{\mathcal{I}_P})$ . Let each column vector  $\mathbf{A}_i \mathbf{h}$  of an equivalent channel matrix  $\mathcal{H}(\mathbf{h})$  be denoted as  $\mathcal{H}_i(\mathbf{h})$ ,  $\forall i \in \mathcal{I}$ . Then we have

$$\mathcal{H}(\mathbf{h}) \triangleq [\mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) \dots \mathcal{H}_{\mathcal{I}_P}(\mathbf{h})], \quad (32)$$

where grouping vector set is given by

$$\mathcal{H}_{\mathcal{I}_p}(\mathbf{h}) \triangleq [\mathcal{H}_{i_{p,1}}(\mathbf{h}) \dots \mathcal{H}_{i_{p,\eta_p}}(\mathbf{h})]. \quad (33)$$

Consequently, the formula in (29) can be described as

$$\mathbf{Y} = \sqrt{\frac{\rho}{M_t}} \sum_{p=1}^P \mathcal{H}_{\mathcal{I}_p}(\mathbf{h}) \mathbf{x}_{\mathcal{I}_p} + \mathbf{N}. \quad (34)$$

At the receiver, we need to recover the symbol vector embedded in the  $p^{th}$  subset  $\mathbf{x}_{\mathcal{I}_p}$ . To apply the PIC group decoding to completely eliminate the interferences from other subsets  $\mathbf{x}_{\mathcal{I}_q}$  for  $p \neq q$ , a suitable operation (matched filtering and symbol-rate sampling)  $\Gamma_{\mathcal{I}_p}(\mathbf{h})$  should be designed such that all interferences from other subsets  $\mathbf{x}_{\mathcal{I}_q}$  are eliminated while multiplying  $\mathbf{Y}$  by  $\Gamma_{\mathcal{I}_p}(\mathbf{h})$ , i.e.,  $\Gamma_{\mathcal{I}_p}(\mathbf{h}) \cdot \mathcal{H}_{\mathcal{I}_q}(\mathbf{h}) = 0$ . The interference cancellation matrix  $\Gamma_{\mathcal{I}_p}$  can be chosen from formula

$$\Gamma_{\mathcal{I}_p}(\mathbf{h}) = I_{NM_r M_b} - \mathbf{Q}_{\mathcal{I}_p}(\mathbf{h}), \quad (35)$$

where

$$\mathbf{Q}_{\mathcal{I}_p}(\mathbf{h}) = \mathcal{H}_{\mathcal{I}_p}^c(\mathbf{h}) [(\mathcal{H}_{\mathcal{I}_p}^c(\mathbf{h}))^{\langle \text{mathrm} \rangle H} \mathcal{H}_{\mathcal{I}_p}^c(\mathbf{h})]^{-1} (\mathcal{H}_{\mathcal{I}_p}^c(\mathbf{h}))^{\langle \text{mathrm} \rangle H},$$

and  $\mathcal{H}_{\mathcal{I}_p}^c(\mathbf{h})$  of size  $N M_r M_b \times (\eta - \eta_p)$  denotes the reduced matrix that is obtained by removing the column vectors in  $\mathcal{H}(\mathbf{h})$  with indices in  $\mathcal{I}_p$ , i.e.,

$$\mathcal{H}_{\mathcal{I}_p}^c(\mathbf{h}) = [\mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) \cdots \mathcal{H}_{\mathcal{I}_{p-1}}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_{p+1}}(\mathbf{h}) \cdots \mathcal{H}_{\mathcal{I}_\eta}(\mathbf{h})].$$

It is assumed that the reduced matrix  $\mathcal{H}_{\mathcal{I}_p}^c(\mathbf{h})$  is of full column rank. If  $\mathcal{H}_{\mathcal{I}_p}^c(\mathbf{h})$  is not of full column rank, one should pick a maximal linear independent vector set from  $\mathcal{H}_{\mathcal{I}_p}^c(\mathbf{h})$ , from which an interference cancellation matrix  $\Gamma_{\mathcal{I}_p}(\mathbf{h})$  can be constructed in a similar way.

Using the yielded matrix  $\Gamma_{\mathcal{I}_p}(\mathbf{h})$ ,  $\forall p \in \{1, \dots, P\}$ , we denote  $\mathbf{Z}_{\mathcal{I}_p} = \Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathbf{Y}$  and obtain

$$\mathbf{Z}_{\mathcal{I}_p} = \sqrt{\frac{\rho}{M_t}} \Gamma_{\mathcal{I}_p}(\mathbf{h}) \sum_{p=1}^P \mathcal{H}_{\mathcal{I}_p}(\mathbf{h}) \mathbf{x}_{\mathcal{I}_p} + \Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathbf{N} \quad (36)$$

$$= \sqrt{\frac{\rho}{M_t}} \Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_p}(\mathbf{h}) \mathbf{x}_{\mathcal{I}_p} + \Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathbf{N}. \quad (37)$$

It is shown that the interferences from other symbol subsets are cancelled and output  $\mathbf{Z}_{\mathcal{I}_p}$  contains symbol subset  $\mathbf{x}_{\mathcal{I}_p}$  if the received signal vector  $\mathbf{Y}$  pass through the linear filter  $\Gamma_{\mathcal{I}_p}(\mathbf{h})$ . After that, symbol subset  $\mathbf{x}_{\mathcal{I}_p}$  can be decoded with the ML decoding algorithm through the decision

$$\hat{\mathbf{x}}_{\mathcal{I}_p} = \arg \min_{\mathbf{x}_{\mathcal{I}_p} \in \mathcal{A}^{\eta_p}} \|\mathbf{Z}_{\mathcal{I}_p} - \sqrt{\frac{\rho}{M_t}} \Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_p}(\mathbf{h}) \mathbf{x}_{\mathcal{I}_p}\|_{\langle \text{mathrm} \rangle F}, \quad (38)$$

which is the PIC group decoding algorithm employed in this paper. It is obvious that the complexity of this system is much lower than that of the original system expressed in (29).

In order to decode  $\mathbf{x}$  at the receiver, we consider the dimension-reduced channel model in (36) with the optimal detection of  $\mathbf{x}_{\mathcal{I}_p}$  from  $\mathbf{Z}_{\mathcal{I}_p}$ . It is known that the singular value decomposition (SVD) of  $\Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_p}(\mathbf{h})$  is given by calculating

$$\Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_p}(\mathbf{h}) = U_r \text{diag}(\sigma_1, \dots, \sigma_{\eta_p}) U_c,$$

where  $U_r$  and  $U_c$  are two unitary operations. Then we can design the PIC group decoding algorithm, in which the different decoding orders may result in different performances. Thus we should select a proper decoding order so that the dimension-reduced system at the current decoding stage has the best upper-bound of pair-wise error probability (PEP) performance. Let  $\mathbf{x}_{\mathcal{I}_p}, \bar{\mathbf{x}}_{\mathcal{I}_p} \in \mathcal{A}^{\eta_p}$  are two different vectors, and  $\Delta \mathbf{x}_{\mathcal{I}_p} = \mathbf{x}_{\mathcal{I}_p} - \bar{\mathbf{x}}_{\mathcal{I}_p}$ . For the  $p^{th}$  dimension-reduced system, the upper-bound of PEP can be calculated as

$$\mathcal{P}(\mathbf{x}_{\mathcal{I}_p} \rightarrow \bar{\mathbf{x}}_{\mathcal{I}_p}) = \mathcal{Q}(\|\sqrt{\frac{\rho}{M_t}} \Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_p}(\mathbf{h}) \Delta \mathbf{x}_{\mathcal{I}_p}\|_{\langle \text{norm} \rangle} F) \quad (39)$$

$$= \mathcal{Q}(\sqrt{\frac{\rho}{M_t}} \|\text{diag}(\sigma_1, \dots, \sigma_{\eta_p}) U_c \Delta \mathbf{x}_{\mathcal{I}_p}\|_{\langle \text{norm} \rangle} F) \quad (40)$$

$$\leq \mathcal{Q}(\sqrt{\frac{\rho}{M_t}} \|\Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_p}(\mathbf{h})\|_{\langle \text{norm} \rangle} \text{Fmin}\{U_c \Delta \mathbf{x}_{\mathcal{I}_p}\}), \quad (41)$$

where  $\min\{U_c \Delta \mathbf{x}_{\mathcal{I}_p}\}$  denotes the minimum value among the absolute values of the entries of vector  $U_c \Delta \mathbf{x}_{\mathcal{I}_p}$ . Thus, the dimension-reduced system with the largest  $\|\Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_p}(\mathbf{h})\|_{\langle \text{norm} \rangle} F$  has the smallest upper-bound of PEP. Without loss of generality, we assume that

$$\|\Gamma_{\mathcal{I}_1}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_1}(\mathbf{h})\|_{\langle \text{norm} \rangle} F \geq \dots \geq \|\Gamma_{\mathcal{I}_P}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_P}(\mathbf{h})\|_{\langle \text{norm} \rangle} F,$$

which corresponds to the ordered symbol sets  $\mathbf{x}_{\mathcal{I}_1}, \mathbf{x}_{\mathcal{I}_2}, \dots, \mathbf{x}_{\mathcal{I}_P}$ . Then the ordered PIC group decoding algorithm can be designed as follows.

1. Decode the first set of symbols  $\mathbf{x}_{\mathcal{I}_1}$  with the PIC group decoding algorithm in (38);
2. Let  $p=1$  and  $\mathbf{Y}_1 = \mathbf{Y}$ , where  $\mathbf{Y}$  is defined in (34);
3. Remove the components of the already-detected symbol set  $\mathbf{x}_{\mathcal{I}_p}$  from (34), i.e.,

$$\mathbf{Y}_{p+1} = \mathbf{Y}_p - \sqrt{\frac{\rho}{M_t}} \mathcal{H}_{\mathcal{I}_p}(\mathbf{h}) \mathbf{x}_{\mathcal{I}_p} \quad (42)$$

$$= \sqrt{\frac{\rho}{M_t}} \sum_{j=p+1}^P \mathcal{H}_{\mathcal{I}_j}(\mathbf{h}) \mathbf{x}_{\mathcal{I}_j} + \mathbf{N}. \quad (43)$$

4. Decoding  $\mathbf{x}_{\mathcal{I}_{p+1}}$  in (42) using the PIC group decoding algorithm in (38);
5. If  $p < P$ , then set  $p := p+1$  and go to 3); otherwise stop the algorithm.

In order to derive the design criterion for the high-rate STF coding schemes achieving full-diversity with the PIC group decoding, we cite the main results of the STBC design criterion to achieve full diversity with the PIC group decoding [Xia09], which can be stated as follows.

*Theorem 2.1:* For an SF/STF code  $\mathbf{X}(\mathbf{x}) \in \mathcal{X}$  with the PIC group decoding over the frequency-selective channels, full diversity is achieved for  $\mathbf{h} \neq 0$  when the code  $\mathbf{X}$  satisfies the full rank criterion, i.e., it achieves full diversity when the ML receiver is used; and for a fixed  $p$ , any nonzero linear combination over  $\Delta \mathcal{A}$  of vectors in the  $p^{th}$  subset  $\mathcal{H}_{\mathcal{I}_p}$  does not belong to the space linearly spanned by all vectors in the remaining vector subsets  $\{\mathcal{H}_{\mathcal{I}_q}; q \neq p\}$ ,  $\forall p, q \in \{1, \dots, P\}$ .

Notice that in the PIC group decoding, we may use successive interference cancellation (SIC) strategy in decoding process. The main idea of this strategy is to remove the already-decoded symbols from the received signals to reduce interferences as that of the decoding process in (42). For the properly-selected decoding order, for example  $(\mathbf{x}_{\mathcal{I}_1}, \dots, \mathbf{x}_{\mathcal{I}_P})$ , we can first decode symbol subset  $\mathbf{x}_{\mathcal{I}_1}$  by the PIC group decoding to obtain the decision elements  $\hat{\mathbf{x}}_{\mathcal{I}_1}$ . After removing the already-detected symbol group  $\hat{\mathbf{x}}_{\mathcal{I}_1}$  from (34)

$$\mathbf{Y}_1 = \mathbf{Y} - \sqrt{\frac{\rho}{M_t}} \mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) \hat{\mathbf{x}}_{\mathcal{I}_1} \quad (44)$$

we decode  $\hat{\mathbf{x}}_{\mathcal{I}_2}$  from (44) by the PIC group decoding. Repeat this process till all symbols are decoded. Then, the full diversity criterion for the ordered PIC group decoding for the STF code in terms of the PEP performance can be similarly stated in [Xia09].

*Theorem 2.2:* For an SF/STF  $\mathbf{X}(\mathbf{x}) \in \mathcal{X}$  with the ordered SIC group decoding, full diversity is achieved when code  $X$  satisfies the full rank criterion, i.e., it achieves full diversity when the ML receiver is deployed; and at each decoding stage, for the  $p^{th}$  dimension-reduced equivalent channel  $\mathcal{H}_{\mathcal{I}_p}(\mathbf{h})$  corresponding to the current to-be decoded symbol subset  $\mathbf{x}_{\mathcal{I}_p}$ , any nonzero linear combination over  $\Delta \mathcal{A}$  of vectors in  $\mathcal{H}_{\mathcal{I}_p}(\mathbf{h})$  does not belong to the space linearly spanned by all vectors in subsets  $\{\mathcal{H}_{\mathcal{I}_{p+1}}(\mathbf{h}), \dots, \mathcal{H}_{\mathcal{I}_P}(\mathbf{h})\}$  for any  $\mathbf{h} \neq 0$ .

The proof of Theorem 2.1 and Theorem 2.2 can be found in Ref.[Xia09] while deriving the PIC decoding criteria for the STBC in the Guo-Xia's main theorem.

We note that for the ZF receiver, the estimate  $\hat{\mathbf{x}}^{ZF}$  of the transmitted symbols  $\mathbf{x}$  embedded in  $\mathbf{X}(\mathbf{x})$  is

$$\hat{\mathbf{x}}^{ZF} = \arg \min_{\mathbf{x} \in \mathcal{A}^\eta} \|\Gamma^{ZF}(\mathbf{h})\mathbf{Y} - \mathbf{x}\|_{\langle \text{mathrm} \rangle F}, \quad (45)$$

where  $\Gamma^{ZF} = \sqrt{\frac{M_t}{\rho}} [\mathcal{H}(\mathbf{h})_{\langle \text{mathrm} \rangle} H \mathcal{H}(\mathbf{h})]^{-1} \mathcal{H}(\mathbf{h})_{\langle \text{mathrm} \rangle} H$ . For the ML receiver the estimate  $\hat{\mathbf{x}}^{ML}$  is given by

$$\hat{\mathbf{x}}^{ML} = \arg \min_{\mathbf{x} \in \mathcal{A}^\eta} \|\mathbf{Y} - \sqrt{\frac{\rho}{M_t}} \mathcal{H}(\mathbf{h})\mathbf{x}\|_{\langle \text{mathrm} \rangle F}. \quad (46)$$



The decoding complexity is defined as the number of squared Frobenious norms  $\|\cdot\|_{\langle \text{mathrm} \rangle F}$  computed in decoding process. Consequently, the decoding complexity of the ZF detection for the SF/STF code is  $\eta|\mathcal{A}|$  while the decoding complexity of the ML detection is  $|\mathcal{A}|^\eta$ . However, the complexity of the PIC group decoding algorithm for the present SF/STF code is calculated as  $\sum_{p=1}^P |\mathcal{A}|^{\eta_p}$ . It implies that the PIC group decoding for the SF/STF code has also provided a flexible decoding complexity as that of the STFC, which is a tradeoff between the ZF decoding and the ML decoding. In particular, if  $P=1$ , then the grouping scheme of the SF/STF code is  $\mathcal{I} = \{\mathcal{I}_1\}$  and then the PIC group decoding is equivalent to the ML decoding where all information symbols in  $\mathbf{x}$  are jointly decoded. If  $P=\eta$ , then the grouping scheme is  $\mathcal{I} = \{\mathcal{I}_1, \dots, \mathcal{I}_\eta\}$  with  $\mathcal{I}_i = \{i\}$ ,  $\forall i \in \{1, \dots, \eta\}$  and then the PIC group decoding is equivalent to the ZF decoding where each information symbol can be decoded independently.

### 3 SF/STF Coding Design Criterion with the PIC Group Decoding

In this section, we consider a design criterion for the linear dispersion SF/STF code that achieves full diversity with the PIC group decoding. The present design is derived from the STBC design criterion for the flat-fading channels [Xia09] with appropriate adjustments.

As for the performance of a decoding algorithm for an MIMO-OFDM system, it is related to the diversity order. For an MIMO-OFDM system with  $M_t$  transmit antennas,  $M_r$  receiver antennas and  $L$  independent channel taps, the maximum diversity order is  $L M_t M_r$ . While optimizing the reception performance of this system, full diversity is usually pursued which can be achieved by using a suitable signal transmitting scheme. Thus the "rank-and-determinant criterion" of the SF/STF code design was proposed to maximize both the diversity gain and coding gain with the ML decoding. In order to achieve full diversity with the PIC group decoding, the STBC design criterion has been derived for flat-fading channels [Xia09]. However, the code design of the full-diversity SF/STF code with the PIC group decoding still remains an open problem.

In order to analyze full diversity of the SF/STF codes, we consider the system model in (34). For any two distinct complex numbers  $x_u, x_v \in \mathcal{A}$  and two distinct complex vectors  $\mathbf{x}_u, \mathbf{x}_v \in \mathcal{A}^\eta$ , we take notations  $\Delta x = x_u - x_v \in \Delta \mathcal{A}$  and  $\Delta \mathbf{x} = \mathbf{x}_u - \mathbf{x}_v \in \Delta \mathcal{A}^\eta$ , respectively.

*Definition 3.1:* The channel system in (34) achieves diversity order  $d = \prod_{i=1}^4 r_i$  with the ML receiver if the equivalent channel  $\mathcal{H}(\mathbf{h}) = \{\mathcal{H}_{\mathcal{I}_p}: 1 \leq p \leq P\}$  satisfy the following inequality

$$\|\mathcal{H}(\mathbf{h}) \Delta \mathbf{x}\|_{\langle \text{mathrm} \rangle F^2} \geq c \cdot \sum_{i_\nu=1}^{r_1} \sum_{j_\nu=1}^{r_2} \sum_{k_\nu=1}^{r_3} \sum_{n_\nu=1}^{r_4} |H_{i_\nu, j_\nu}^{k_\nu}(n_\nu)|^2 \cdot \|\Delta \mathbf{x}\|_{\langle \text{mathrm} \rangle F^2}, \quad (47)$$

or

$$\|\mathcal{H}(\mathbf{h}) \Delta \mathbf{x}\|_{\langle \text{mathrm} \rangle} F^2 \geq c \cdot \sum_{i_\nu=1}^{r_1} \sum_{j_\nu=1}^{r_2} \sum_{k_\nu=1}^{r_3} \sum_{l_\nu=1}^{r_4} |\alpha_{i_\nu, j_\nu}^{k_\nu}(l_\nu)|^2 \cdot \|\Delta \mathbf{x}\|_{\langle \text{mathrm} \rangle} F^2, \quad (48)$$

where  $c$  is a positive constant,  $\{i_1, \dots, i_{r_1}\} \subseteq \{1, \dots, M_t\}$ ,  $\{j_1, \dots, j_{r_2}\} \subseteq \{1, \dots, M_r\}$ ,  $\{k_1, \dots, k_{r_3}\} \subseteq \{1, \dots, M_b\}$ ,  $\{n_1, \dots, n_{r_4}\} \subseteq \{0, \dots, N-1\}$ , and  $\{l_1, \dots, l_{r_4}\} \subseteq \{0, \dots, L-1\}$ .

*Theorem 3.1:* Consider the channel model in (29) with the given linear dispersion  $\mathbf{X} \in \mathcal{X}$  for signal constellation  $\mathcal{A}$ . Let  $\mathcal{H}(\mathbf{h})$  be the equivalent channel of  $\mathbf{X}$  for any  $\mathbf{h} \neq 0$ . If the  $\eta$  column vectors of  $\mathcal{H}(\mathbf{h})$  are linearly independent over  $\Delta \mathcal{A}$ , then the coding scheme  $\mathcal{X}$  has power gain order  $L M_t M_r M_b$  and hence achieves diversity order  $L M_t M_r M_b$ .

*Proof:* The proof can be found in Appendix A.

*Theorem 3.2:* For an arbitrary linear dispersion  $\mathbf{X} \in \mathcal{X}$  of the SF/STF code with the equivalent channel  $\mathcal{H}(\mathbf{h})$  for any  $\mathbf{h} \neq 0$ , it has the full rank property if and only if the  $\eta$  column vectors of  $\mathcal{H}(\mathbf{h})$  are linearly independent over  $\Delta \mathcal{A}$ .

*Proof:* The proof can be found in Appendix B.

Next we derive an SF/STF code design criterion based on the PIC group decoding.

*Theorem 3.3:* Consider the linear dispersion SF/STF code  $\mathbf{X} \in \mathcal{X}$ . The communication system in (29) has  $M_t$  transmit antennas,  $M_r$  receive antennas,  $N$  subcarriers corresponding to  $L$  independent channel taps with  $P$  equivalent channel groups,  $\{\mathcal{H}_{\mathcal{I}_p}(\mathbf{h}) \in \mathbb{C}^{N M_r M_b \times \eta_p}; 1 \leq p \leq P\}$ . The received signal is decoded with the PIC group decoding via grouping index sets  $\{\mathcal{I}_p; 1 \leq p \leq P\}$ . Then each dimension-reduced system

$$\mathbf{z}_{\mathcal{I}_p} = \sqrt{\frac{\rho}{M_t}} \Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_p}(\mathbf{h}) \mathbf{x}_{\mathcal{I}_p} + \Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathbf{N}, \quad (49)$$

has diversity gain order  $L M_t M_r M_b$  if and only if

- 1) Full-diversity Criteria: for any two linear dispersions  $\mathbf{X}$  and  $\tilde{\mathbf{X}}$  corresponding to distinct codewords  $\mathbf{C}$  and  $\tilde{\mathbf{C}}$ , matrix  $\Delta \mathbf{X} = \mathbf{X} - \tilde{\mathbf{X}} \in \mathcal{X}$  has the full rank;
- 2) Linear-independent Criteria: for an arbitrary subset  $\mathcal{H}_{\mathcal{I}_p}(\mathbf{h})$ , any non-zero linear combination over  $\Delta \mathcal{A}$  of the  $\eta_p$  column vectors in  $\mathcal{H}_{\mathcal{I}_p}(\mathbf{h})$  does not belong to the linear space spanned by all vectors in the remaining  $P-1$  subsets  $\{\mathcal{H}_{\mathcal{I}_q}(\mathbf{h}); q \neq p\}$  of the equivalent channel  $\mathcal{H}(\mathbf{h})$ .

*Proof:* The proof can be found in Appendix C.

Recently, the SF/STF code design criteria for multiple access channels has been introduced on the basis of the error event analysis with different error regions [tner05, Gallager85]. For the region where a single error event dominates, the well known SF code for a single OFDM block, i.e.,  $M_b = 1$ , can work well. However, for the region where more than one OFDM blocks, i.e.,  $M_b \geq 2$ , in error dominate, it requires a joint OFDM block design criteria. In the following, we shall show the PEP performance for multiple access channels with multiple OFDM blocks.

Let  $\mathbf{C} = [\mathbf{C}_1^{\langle \text{mathrm} \rangle T} \mathbf{C}_2^{\langle \text{mathrm} \rangle T} \dots \mathbf{C}_{M_b}^{\langle \text{mathrm} \rangle T}]^{\langle \text{mathrm} \rangle T}$  and  $\tilde{\mathbf{C}} = [\tilde{\mathbf{C}}_1^{\langle \text{mathrm} \rangle T} \tilde{\mathbf{C}}_2^{\langle \text{mathrm} \rangle T} \dots \tilde{\mathbf{C}}_{M_b}^{\langle \text{mathrm} \rangle T}]^{\langle \text{mathrm} \rangle T}$  be the transmitted and received codeword, respectively. We consider the PEP denoted by  $\mathcal{P}(\mathbf{C} \rightarrow \tilde{\mathbf{C}})$ . Let  $\Omega_k$  be the set of block index  $k$  such that  $\mathbf{C}_k \neq \tilde{\mathbf{C}}_k, \forall k \in \Omega_k \subseteq \{1, \dots, M_b\}$ . As an example, taking  $k = 1$ , we have  $\Omega_1 = \{\{1\}, \dots, \{\Omega_{M_b}\}\}$ . Then, for  $\mathbf{C} \neq \tilde{\mathbf{C}}$ , we have  $|\Omega_k| \geq 1$ , and hence  $\mathbf{C}_\Omega \triangleq \{\mathbf{C}_k \neq \tilde{\mathbf{C}}_k: k \in \Omega_k\}$ . Consequently, the PEP  $\mathcal{P}(\mathbf{C} \rightarrow \tilde{\mathbf{C}})$  is given by

$$\mathcal{P}(\mathbf{C} \rightarrow \tilde{\mathbf{C}}) = \sum_{k=1}^{M_b} \sum_{\Omega_k} \mathcal{P}(\mathbf{C} \rightarrow \tilde{\mathbf{C}}, \mathbf{C}_{\Omega_k}) \quad (50)$$

The terms in (50) characterize all error events of the pairwise codeword error corresponding to  $(\mathbf{C}, \tilde{\mathbf{C}})$ . Without loss of generality, we take  $M_b = 2$  as an example to illustrate the PEP of the STF code. Then we have

$$\mathcal{P}(\mathbf{C} \rightarrow \tilde{\mathbf{C}}) = \sum_{k \in \{1, 2\}} \mathcal{P}(\mathbf{C} \rightarrow \tilde{\mathbf{C}}, \mathbf{C}_k \neq \tilde{\mathbf{C}}_k) \quad (51)$$

$$= \mathcal{P}(\mathbf{C} \rightarrow \tilde{\mathbf{C}}, \mathbf{C}_1 \neq \tilde{\mathbf{C}}_1, \mathbf{C}_2 = \tilde{\mathbf{C}}_2) \quad (52)$$

$$+ \mathcal{P}(\mathbf{C} \rightarrow \tilde{\mathbf{C}}, \mathbf{C}_1 = \tilde{\mathbf{C}}_1, \mathbf{C}_2 \neq \tilde{\mathbf{C}}_2) \quad (53)$$

$$+ \mathcal{P}(\mathbf{C} \rightarrow \tilde{\mathbf{C}}, \mathbf{C}_1 \neq \tilde{\mathbf{C}}_1, \mathbf{C}_2 \neq \tilde{\mathbf{C}}_2). \quad (54)$$

We note that the first term in (51) implies the error probability of the event that only the first block  $\mathbf{C}_1$  is in error. Namely, for the single block  $\mathbf{C}_1$  with the coding gain  $c_1$  and rank  $d_1 = M_r \cdot \min_{\mathbf{C}_1 \neq \tilde{\mathbf{C}}_1} \text{rank}(\mathbf{C} - \tilde{\mathbf{C}})$ , we have

$$\mathcal{P}_{10} = \mathcal{P}(\mathbf{C}_1 \rightarrow \tilde{\mathbf{C}}_1, \mathbf{C}_1 \neq \tilde{\mathbf{C}}_1, \mathbf{C}_2 = \tilde{\mathbf{C}}_2) \quad (55)$$

$$= \mathcal{P}(\mathbf{C}_1 \rightarrow \tilde{\mathbf{C}}_1) \mathcal{P}(\mathbf{C}_1 \neq \tilde{\mathbf{C}}_1) \mathcal{P}(\mathbf{C}_2 = \tilde{\mathbf{C}}_2) \quad (56)$$

$$\leq c_1 \left(\frac{\rho}{M_t}\right)^{-d_1} (1 - \alpha_1) \alpha_2, \quad (57)$$

where  $\alpha_k \triangleq P(\mathbf{C}_k = \tilde{\mathbf{C}}_k), \forall k \in \{1, 2\}$ . Similarly, the second term represents the error for the second block  $\mathbf{C}_2$  while the first block is correctly decoded, i.e.,

$$\mathcal{P}_{01} = \mathcal{P}(\mathbf{C}_2 \rightarrow \tilde{\mathbf{C}}_2, \mathbf{C}_1 = \tilde{\mathbf{C}}_1, \mathbf{C}_2 \neq \tilde{\mathbf{C}}_2) \quad (58)$$

$$= \mathcal{P}(\mathbf{C}_2 \rightarrow \tilde{\mathbf{C}}_2) \mathcal{P}(\mathbf{C}_1 = \tilde{\mathbf{C}}_1) \mathcal{P}(\mathbf{C}_2 \neq \tilde{\mathbf{C}}_2) \quad (59)$$

$$\leq c_2 \left(\frac{\rho}{M_t}\right)^{-d_2} (1 - \alpha_2) \alpha_1. \quad (60)$$

where  $c_2$  is the coding gain and  $d_2 = M_r \cdot \min_{\mathbf{C}_2 \neq \tilde{\mathbf{C}}_2} \text{rank}(\mathbf{C} - \tilde{\mathbf{C}})$ . The last term denotes that two blocks  $\mathbf{C}_1$  and  $\mathbf{C}_2$  are both in errors, i.e.,

$$\mathcal{P}_{11} = \mathcal{P}(\mathbf{C} \rightarrow \tilde{\mathbf{C}}, \mathbf{C}_1 \neq \tilde{\mathbf{C}}_1, \mathbf{C}_2 \neq \tilde{\mathbf{C}}_2) \quad (61)$$

$$= \mathcal{P}(\mathbf{C} \rightarrow \tilde{\mathbf{C}}) \mathcal{P}(\mathbf{C}_1 \neq \tilde{\mathbf{C}}_1) \mathcal{P}(\mathbf{C}_2 \neq \tilde{\mathbf{C}}_2) \quad (62)$$

$$\leq c_3 \left(\frac{\rho}{M_t}\right)^{-d_3} (1 - \alpha_1) (1 - \alpha_2), \quad (63)$$

where  $c_3$  is the coding gain and  $d_3 = M_r \cdot \min_{\mathbf{C}_1 \neq \tilde{\mathbf{C}}_1, \mathbf{C}_2 \neq \tilde{\mathbf{C}}_2} \text{rank}(\mathbf{C} - \tilde{\mathbf{C}})$ . Therefore we have the total PEP of the STF code as follows

$$\mathcal{P}(\mathbf{C} \rightarrow \tilde{\mathbf{C}}) = \mathcal{P}_{10} + \mathcal{P}_{01} + \mathcal{P}_{11}. \quad (64)$$

In a case that a single OFDM block is in error, the well known SF code is sufficient to obtain full diversity. While more than one OFDM blocks are in error, the joint STF code design is hence necessary. If the single-block full-diversity SF coding scheme is applied to each OFDM block independently, we get diversity gain order  $L M_t M_r$  which is the maximum achievable diversity gain for this kind of the STF codes. But for the rate region where two blocks are both in error, the PEP in (61) demonstrates that the maximum diversity gain should be larger than that of single blocks. This is because the joint STF code is a concatenation of two single-block SF codes and the maximum achievable diversity gain is twice of  $\mathbf{C}_1$  or  $\mathbf{C}_2$ . Since the maximum achievable diversity of  $\mathcal{P}_{11}$  in the above-mentioned example is  $2 M_t M_r$  which can be achieved when matrix  $\mathbf{C} - \tilde{\mathbf{C}}$  is of full rank for both  $\mathbf{C}_1 - \tilde{\mathbf{C}}_1$  and  $\mathbf{C}_2 - \tilde{\mathbf{C}}_2$ , it can be seen that single-block SF codes are not optimal for the multi-block MIMO-OFDM systems. An optimal STF code for multi-block MIMO-OFDM system should be able to achieve the full diversity in terms of the PEP  $\mathcal{P}_{ij}$ ,  $\forall i, j \in \{0, 1\}$ .

In a case of the STF code with  $M_b$  blocks, the upper bound of the PEP  $\mathcal{P}(\mathbf{C} \rightarrow \tilde{\mathbf{C}})$  is given by

$$\mathcal{P}(\mathbf{C} \rightarrow \tilde{\mathbf{C}}) = \sum_{k=1}^{M_b} \sum_{\Omega_k} \mathcal{P}(\mathbf{C}_k \rightarrow \tilde{\mathbf{C}}_k) \mathcal{P}(\mathbf{C}_k \neq \tilde{\mathbf{C}}_k) \quad (65)$$

$$\leq \sum_{k=1}^{M_b} c_k \left(\frac{\rho}{M_t}\right)^{d_k} p(\mathbf{C}_{\Omega_k}) \quad (66)$$

where  $p(\mathbf{C}_{\Omega_k})$  denotes the probability that only  $k$  out of  $M_b$  blocks have  $\mathbf{C}_k \neq \tilde{\mathbf{C}}_k$ , and  $d_k$  is the minimum rank of matrix  $\mathbf{I}_{M_r} \otimes (\mathbf{C} - \tilde{\mathbf{C}}) \mathbf{H}(\mathbf{C} - \tilde{\mathbf{C}})$ .

Since parameter  $d_k$  denotes diversity order with respect to the PEP when  $k$  OFDM blocks are all in error, the STF code design should guarantee full diversity with  $\{d_k: 1 \leq k \leq M_b\}$  for all possible error events. Concisely, we can write full diversity design criterion of the STF code by considering the PEP performance with all possible error events of  $M_b$  OFDM blocks.

- 3) Multi-Block PEP Criterion: Maximize all diversity gains

$$d_k = M_r \cdot \text{rank}(\mathbf{C} - \tilde{\mathbf{C}}) \quad (67)$$

over all pairs of distinct codewords  $\mathbf{C}$  and  $\tilde{\mathbf{C}}$  when only  $k$  out of  $M_b$  OFDM blocks have  $\mathbf{C}_k \neq \tilde{\mathbf{C}}_k$ .

Currently, many coding scheme of SF/STF codes were proposed with ML receiver. However, no explicit systematic code design is given so far with the PIC group decoding. In what follows, we will propose a systematic design of full diversity SF/STF codes of high symbol rate in terms of the PEP performance with the PIC group decoding.

For a general linear disperse SF/STF code with  $M_b$  OFDM blocks, we use the Chernoff bound to derive an upper bound on the average PEP that matrix codeword  $\mathbf{C}$  is misdecoded as  $\tilde{\mathbf{C}}$ , i.e.,

$$\mathcal{P}(\mathbf{C} \rightarrow \tilde{\mathbf{C}}) \leq \frac{1}{\det(\mathbf{I}_{NM_b M_r} + \frac{\rho}{M_t} \mathbf{K}_s \otimes \mathbf{I}_{M_r})}, \quad (68)$$

where  $\mathbf{K}_s = (\mathbf{C} - \tilde{\mathbf{C}})(\mathbf{C} - \tilde{\mathbf{C}})^{\langle \text{mathrm} \rangle H \circ (R_b \otimes R)}$ . Let  $\lambda_n$  be the  $n^{th}$  eigenvalue of  $\mathbf{K}_s$ . For high SNR, the PEP bound in (68) can be rewritten as

$$\mathcal{P}(\mathbf{C} \rightarrow \tilde{\mathbf{C}}) \leq \frac{1}{\left(\frac{\rho}{M_t}\right)^{\text{rank}(\mathbf{K}_s)M_r} \prod_{n=1}^{\text{rank}(\mathbf{K}_s)} \lambda_n^{M_r}}. \quad (69)$$

Let two sequences  $\{x_i: i \in \mathcal{I}\}$  and  $\{\tilde{x}_i: i \in \mathcal{I}\}$  be the transmitted sequence corresponding to  $\mathbf{C}$  and the received sequence corresponding to  $\tilde{\mathbf{C}}$ , respectively. The difference matrix  $\mathbf{K}_s$  can be calculated by

$$\mathbf{K}_s = \left( \sum_{i=1}^{\eta} \mathbf{A}_i \Delta x_i \right) \left( \sum_{i=1}^{\eta} \mathbf{A}_i \Delta x_i \right)^{\langle \text{mathrm} \rangle H \circ (R_b \otimes R)} \quad (70)$$

$$= \left( \sum_{i1=1}^{\eta} \sum_{i2=1}^{\eta} \mathbf{A}_{i1} \mathbf{A}_{i2}^{\langle \text{mathrm} \rangle H \Delta x_{i1} \Delta x_{i2}^{\langle \text{mathrm} \rangle H} \right) \circ (R_b \otimes R). \quad (71)$$

We note that the rank of  $\mathbf{K}_s$  depends on all possible different linear combinations of matrices  $\mathbf{A}_{i1} \mathbf{A}_{i2}^{\langle \text{mathrm} \rangle H}$ . Namely, we have

$$\mathbf{K}_s = [\Delta \mathbf{x}^{\langle \text{mathrm} \rangle H} \Lambda_s \Delta \mathbf{x}] \circ (R_b \otimes R), \quad (72)$$

where  $\Delta \mathbf{x} = (\Delta x_1, \dots, \Delta x_{\eta})^{\langle \text{mathrm} \rangle T}$ , and

$$\Lambda_s = \begin{bmatrix} \mathbf{A}_1^{\langle \text{mathrm} \rangle H} \mathbf{A}_1 & \dots & \mathbf{A}_1^{\langle \text{mathrm} \rangle H} \mathbf{A}_{\eta} \\ \vdots & \ddots & \vdots \\ \mathbf{A}_{\eta}^{\langle \text{mathrm} \rangle H} \mathbf{A}_1 & \dots & \mathbf{A}_{\eta}^{\langle \text{mathrm} \rangle H} \mathbf{A}_{\eta} \end{bmatrix}.$$

It can be shown that matrix  $\Lambda_s$  is Hermitian semi-definite, and matrix  $\mathbf{K}_s$  is Hermitian semi-definite since  $\eta$  is typically greater than  $M_t$  for the high rate SF/STF code. A necessary condition for  $\Lambda_s$  to be full rank is that each submatrix has the constraint  $\Delta x_i^* \mathbf{A}_i^{\langle \text{mathrm} \rangle H} \mathbf{A}_i \Delta x_i \neq 0, \forall i \in \mathcal{I}$ .

According to the rank inequalities of Hadamard products and Keronecker products in (72), the diversity of the present STF code can be bounded by dimensions of codeword matrices, which is summarized as follows.

*Theorem 3.4:* The diversity of a linear dispersion STF code is less than or equal to  $M_r \min \{L M_t \text{rank}(R_b), N M_b\}$ .

*Proof:* The proof can be found in Appendix D.

It is necessary to note that in a case the frequency-selective channels stay constant over multiple OFDM block, i.e.,  $\text{rank}(R_b) = 1$ , the maximum diversity is at most  $M_r \min \{L M_t, N M_b\}$ . In this case, the STF code can not provide additional diversity advantage compared to the SF code, which will be illustrated in next section.

## 4 Designs of the Stacked STF Codes with Multi-layer Structure

The design of the STF code  $\mathbf{C}_{STF}$  is based on the full-diversity SF code  $\mathbf{C}_{SF}$  of size  $N \times M_t$ . Therefore,  $\mathbf{C}_{STF}$  can be simply constructed by repeating  $\mathbf{C}_{SF}$  multiple times. However, the symbol rate of this code can not be increased so much. In order to design a high symbol rate SF/STF code we propose an STF coding scheme with the multi-layer structure that achieves full diversity with the PIC group decoding.

### 4.1 The STF Codes with STBC Structure

*Example 4.1:* Consider the Alamouti code with  $M_t = 2$ ,  $M_b = 1$ ,  $M_r = 1$ ,  $N = 2$ , and  $P = 2$ . Then the STF code, which is actually an SF code, can be designed as

$$\mathbf{C}_{STF} = \begin{bmatrix} s_{1,1} & s_{2,1} \\ -s_{2,1}^* & s_{1,1}^* \end{bmatrix}, \quad (73)$$

where  $\mathbf{s}_i = \{s_{i,1}\} = \{x_i\}$ ,  $\forall i \in \{1, 2\}$ . The symbol rate of this code is one. Let  $\mathbf{h} \triangleq [H_{i,1}(0), H_{i,1}(1)] = [H_{i,1}^1(0), H_{i,1}^1(1)]$  with the grouping scheme  $\mathcal{I} = \{\mathcal{I}_1, \mathcal{I}_2\} = \{\{1\}, \{2\}\}$ . Then the equivalent channel matrix can be written as

$$\mathcal{H}(\mathbf{h}) = [\mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_2}(\mathbf{h})], \quad (74)$$

where

$$\mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) = \begin{bmatrix} H_{1,1}(0) \\ H_{2,1}^*(1) \end{bmatrix}, \quad \mathcal{H}_{\mathcal{I}_2}(\mathbf{h}) = \begin{bmatrix} H_{2,1}(0) \\ -H_{1,1}^*(1) \end{bmatrix}.$$

It is obvious that  $\mathcal{H}_{\mathcal{I}_1}(\mathbf{h})$  and  $\mathcal{H}_{\mathcal{I}_2}(\mathbf{h})$  are linear independent for  $\mathbf{h} \neq 0$ . Through the direct calculation, the projection matrices  $\Gamma_{\mathcal{I}_1}$  and  $\Gamma_{\mathcal{I}_2}$  can be derived as

$$\Gamma_{\mathcal{I}_1} = h_0^1 \cdot \begin{bmatrix} |H_{1,1}(1)|^2 & H_{1,1}(1) H_{2,1}(0) \\ H_{1,1}^*(1) H_{2,1}^*(0) & |H_{2,1}(0)|^2 \end{bmatrix}, \quad (75)$$

and

$$\Gamma_{\mathcal{I}_2} = h_1^1 \cdot \begin{bmatrix} |H_{2,1}(1)|^2 & -H_{2,1}(1) H_{1,1}(0) \\ -H_{2,1}^*(1) H_{1,1}^*(0) & |H_{1,1}(0)|^2 \end{bmatrix}, \quad (76)$$

where  $h_0^1 = (|H_{2,1}(0)|^2 + |H_{1,1}(1)|^2)^{-1}$  and  $h_1^1 = (|H_{2,1}(0)|^2 + |H_{1,1}(1)|^2)^{-1}$ . After passing the received signal vector  $\mathbf{Y}$  in (34) through two linear filters  $\Gamma_{\mathcal{I}_1}$  and  $\Gamma_{\mathcal{I}_2}$ , the optimal detections of  $x_1$  and  $x_2$  can be achieved as

$$\hat{x}_1 = \arg \min_{\bar{x}_{\mathcal{I}_1} \in \mathcal{A}} \|\Gamma_{\mathcal{I}_1} \mathbf{Y} - \sqrt{\frac{\rho}{2}} \Gamma_{\mathcal{I}_1} \mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) \bar{x}_{\mathcal{I}_1}\|_{\langle \text{mathrm} \rangle F} \quad (77)$$

$$= \arg \min_{\bar{x}_0 \in \mathcal{A}} |H_{1,1}^*(1) Y_1(0) + H_{2,1}(0) Y_1(1)| \quad (78)$$

$$+ \sqrt{\frac{\rho}{2}} (|H_{1,1}(0)|^2 + |H_{2,1}(1)|^2) |\bar{x}_0|, \quad (79)$$

and

$$\hat{x}_2 = \arg \min_{\bar{x}_{\mathcal{I}_2} \in \mathcal{A}} \|\Gamma_{\mathcal{I}_2} \mathbf{Y} - \sqrt{\frac{\rho}{2}} \Gamma_{\mathcal{I}_2} \mathcal{H}_{\mathcal{I}_2}(\mathbf{h}) \bar{x}_{\mathcal{I}_2}\|_{\langle \text{mathrm} \rangle F} \quad (80)$$

$$= \arg \min_{\bar{x}_1 \in \mathcal{A}} |H_{2,1}^*(1) Y_1(0) - H_{1,1}(0) Y_1(1)| \quad (81)$$

$$+ \sqrt{\frac{\rho}{2}} (|H_{2,1}(0)|^2 + |H_{1,1}(1)|^2) |\bar{x}_1|. \quad (82)$$

*Example 4.2:* Consider the Alamouti code with  $M_b = 2$ ,  $M_t = 2$ ,  $M_r = 1$ ,  $N = 2$ , and  $P = 2$ . Then the STF code with two OFDM blocks can be designed as

$$\mathbf{C}_{\text{STF}} = \begin{bmatrix} s_{1,1} & s_{2,1} \\ -s_{2,1}^* & s_{1,1}^* \\ s_{1,2} & s_{2,2} \\ -s_{2,2}^* & s_{1,2}^* \end{bmatrix}, \quad (83)$$

where  $\mathbf{s}_i = (s_{i,1}, s_{i,2})^{\langle \text{mathrm} \rangle T} = (x_{2i-2}, x_{2i-1})^{\langle \text{mathrm} \rangle T}$ ,  $\forall i \in \{1, 2\}$ . Let  $\mathbf{h} \triangleq [H_{i,1}(0), H_{i,1}(1), H_{i,1}(2), H_{i,1}(3)] = [H_{i,1}^1(0), H_{i,1}^1(1), H_{i,1}^2(0), H_{i,1}^2(1)]$  with the grouping scheme  $\mathcal{I} = \{\mathcal{I}_1, \mathcal{I}_2\} = \{\{0, 1\}, \{2, 3\}\}$ . Then the equivalent channel matrix can be written as follows

$$\mathcal{H}(\mathbf{h}) = [\mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_2}(\mathbf{h})], \quad (84)$$

where

$$\mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) = \begin{bmatrix} H_{1,1}(0) & 0 \\ H_{2,1}^*(1) & 0 \\ 0 & H_{1,1}(2) \\ 0 & H_{2,1}^*(3) \end{bmatrix},$$

and

$$\mathcal{H}_{\mathcal{I}_2}(\mathbf{h}) = \begin{bmatrix} H_{2,1}(0) & 0 \\ -H_{1,1}^*(1) & 0 \\ 0 & H_{2,1}(2) \\ 0 & -H_{1,1}^*(3) \end{bmatrix}.$$

It is obvious that  $\mathcal{H}_{\mathcal{I}_1}(\mathbf{h})$  and  $\mathcal{H}_{\mathcal{I}_2}(\mathbf{h})$  are linear independent. Namely, an arbitrary column vector of  $\mathcal{H}_{\mathcal{I}_1}(\mathbf{h})$  does not belong to the linear space spanned by all column vectors of  $\mathcal{H}_{\mathcal{I}_2}(\mathbf{h})$  over  $\Delta \mathcal{A}$ . According to (35), two projection matrices  $\Gamma_{\mathcal{I}_1}$  and  $\Gamma_{\mathcal{I}_2}$  can be obtained as

$$\Gamma_{\mathcal{I}_1} = \begin{bmatrix} \Gamma_{\mathcal{I}_1}^{(0)} & 0_{2 \times 2} \\ 0_{2 \times 2} & \Gamma_{\mathcal{I}_1}^{(1)} \end{bmatrix}, \Gamma_{\mathcal{I}_2} = \begin{bmatrix} \Gamma_{\mathcal{I}_2}^{(0)} & 0_{2 \times 2} \\ 0_{2 \times 2} & \Gamma_{\mathcal{I}_2}^{(1)} \end{bmatrix}, \quad (85)$$

where  $\Gamma_{\mathcal{I}_1}^{(i)}$  and  $\Gamma_{\mathcal{I}_2}^{(i)}$  can be calculated from the formulas in

$$\Gamma_{\mathcal{I}_1}^{(i)} = h_i^{(2)} \begin{bmatrix} |H_{1,1}(i+1)|^2 & H_{1,1}(i+1) H_{2,1}(i) \\ H_{1,1}^*(i+1) H_{2,1}^*(i) & |H_{2,1}(i)|^2 \end{bmatrix}, \quad (86)$$

and

$$\Gamma_{\mathcal{I}_2}^{(i)} = h_{i+1}^{(2)} \begin{bmatrix} |H_{2,1}(i+1)|^2 & -H_{2,1}(i+1) H_{1,1}(i) \\ -H_{2,1}^*(i+1) H_{1,1}^*(i) & |H_{1,1}(i)|^2 \end{bmatrix}, \quad (87)$$

where  $h_i^{(2)} = (|H_{2,1}(i)|^2 + |H_{1,1}(i+1)|^2)^{-1}$  and  $h_{i+1}^{(2)} = (|H_{1,1}(i)|^2 + |H_{2,1}(i+1)|^2)^{-1}$ ,  $\forall i \in \{0, 1\}$ . In a similar way, optimal detections of  $\mathbf{x}_{\mathcal{I}_1}$  and  $\mathbf{x}_{\mathcal{I}_2}$  can be calculated as

$$\hat{\mathbf{x}}_{\mathcal{I}_1} = \arg \min_{\mathbf{x}_{\mathcal{I}_1} \in \mathcal{A}^2} \|\Gamma_{\mathcal{I}_1} \mathbf{Y} - \sqrt{\frac{\rho}{2}} \Gamma_{\mathcal{I}_1} \mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) \bar{\mathbf{x}}_{\mathcal{I}_1}\|_{\langle \text{mathrm} \rangle F} \quad (88)$$

$$= \arg \min_{\bar{x}_1, \bar{x}_2 \in \mathcal{A}} |H_{1,1}^*(1) Y_1(0) + H_{2,1}(0) Y_1(1) \quad (89)$$

$$+ H_{1,1}^*(3) Y_1(2) + H_{2,1}(2) Y_1(3) + \sqrt{\frac{\rho}{2}} [|H_{1,1}(0)|^2 \quad (90)$$

$$+ |H_{2,1}(1)|^2] \bar{x}_0 + (|H_{1,1}(2)|^2 + |H_{2,1}(3)|^2) \bar{x}_1], \quad (91)$$

and

$$\hat{\mathbf{x}}_{\mathcal{I}_2} = \arg \min_{\mathbf{x}_{\mathcal{I}_2} \in \mathcal{A}^2} \|\Gamma_{\mathcal{I}_2} \mathbf{Y} - \sqrt{\frac{\rho}{2}} \Gamma_{\mathcal{I}_2} \mathcal{H}_{\mathcal{I}_2}(\mathbf{h}) \bar{\mathbf{x}}_{\mathcal{I}_2}\|_{\langle \text{mathrm} \rangle F} \quad (92)$$

$$= \arg \min_{\bar{x}_2, \bar{x}_3 \in \mathcal{A}} |H_{2,1}^*(1) Y_1(0) - H_{1,1}(0) Y_1(1) \quad (93)$$

$$+ H_{2,1}^*(3) Y_1(2) - H_{1,1}(2) Y_1(3) + \sqrt{\frac{\rho}{2}} [|H_{2,1}(0)|^2 \quad (94)$$

$$+ |H_{1,1}(1)|^2] \bar{x}_2 + (|H_{2,1}(2)|^2 + |H_{1,1}(3)|^2) \bar{x}_3]. \quad (95)$$

## 4.2 Stacked STF Codes with Multi-layer Structure

Based on the above-mentioned decoding approach, we obtain the symbols in two subsets using ML decoding with lower complexity than that of direct ML decoding for symbols  $\mathbf{x}_{\langle \text{mathcal} \rangle I}$  without grouping. However, the symbol rate is bounded by one for this STF code. Deploying the similar STF coding scheme with the PIC decoding, it can be extended by vertical stacking to  $M_b$  SF/STF codes  $\mathbf{C}_{SF}$  of size  $N \times M_t$ , given by

$$\mathbf{C}_{ESTF} = [\mathbf{C}_{SF}^{\langle \text{mathrm} \rangle T} \mathbf{C}_{SF}^{\langle \text{mathrm} \rangle T} \dots \mathbf{C}_{SF}^{\langle \text{mathrm} \rangle T}]^{\langle \text{mathrm} \rangle T}, \quad (96)$$



which has size  $M_b N \times M_t$ . For each  $M_b \geq 1$ , the extended STF code  $\mathbf{C}_{ESTF}$  and the original SF code  $\mathbf{C}_{SF}$  have the same characteristics in terms of the PEP performance, such as the symbol rate, transmit diversity and coding gain [H00]. Namely, the symbol rate, transmit diversity and coding gain of the stacked STF code is equal to that of the constituent SF code.

According to the stacked STF code  $\mathbf{C}_{ESTF}$ , its performance benefits from the improvement of the component SF code  $\mathbf{C}_{SF}$ . Consequently, the maximization of the symbol rate, transmit diversity and coding gain of the stacked STF code  $\mathbf{C}_{ESTF}$  reduces to the selection of the component SF code  $\mathbf{C}_{SF}$  which has the maximum symbol rate, transmit diversity and coding gain. To design a high-rate STF code with low-decoding complexity, we focus on such a perspicacious selection of the component SF code  $\mathbf{C}_{SF}$ , a multi-layer SF/STF code, achieving full-diversity with the PIC decoding.

*Example 4.3:* Consider an SF code  $\mathbf{C}_{SF}$  with  $M_t = 2$ ,  $M_r = 1$ ,  $N = 3$  and  $P = 2$  as follows

$$\mathbf{C}_{SF} = \begin{bmatrix} s_{1,1} & 0 \\ s_{2,1} & s_{1,2} \\ 0 & s_{2,2} \end{bmatrix}. \quad (97)$$

where  $\mathbf{s}_i = (s_{i,1}, s_{i,2})^{\text{tr}} T = \Theta_2(x_{2(i-1)+1}, x_{2(i-1)+2})^{\text{tr}} T$ ,  $\forall i \in \{1, 2\}$  and  $\Theta_2$  is the transformed matrix

$$\Theta_2 = \begin{bmatrix} \cos \theta & \sin \theta \\ -\sin \theta & \cos \theta \end{bmatrix}, \quad (98)$$

where  $\theta \in (0, 2\pi)$ . The symbol rate of this code is  $4/3$ . It is easy to prove that  $\mathbf{C}_{SF}$  has full rank property, which is equivalent to the STBC that achieves full diversity using PIC group decoding algorithm [Xia09]. Actually, since there is only one receive antenna with

$$\mathbf{h} \triangleq [H_{1,1}(0), H_{1,1}(1), H_{1,1}(2), H_{2,1}(0), H_{2,1}(1), H_{2,1}(2)],$$

the equivalent channel  $\mathcal{H}(\mathbf{h})$  can be written as

$$\mathcal{H}(\mathbf{h}) = [\mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_2}(\mathbf{h})], \quad (99)$$

where

$$\mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) = \begin{bmatrix} \cos \theta H_{1,1}(0) & \sin \theta H_{1,1}(0) \\ -\sin \theta H_{2,1}(1) & \cos \theta H_{2,1}(1) \\ 0 & 0 \end{bmatrix}$$

and

$$\mathcal{H}_{\mathcal{I}_2}(\mathbf{h}) = \begin{bmatrix} 0 & 0 \\ \cos \theta H_{1,1}(1) & \sin \theta H_{1,1}(1) \\ -\sin \theta H_{2,1}(2) & \cos \theta H_{2,1}(2) \end{bmatrix}.$$

It is obvious that  $\mathcal{H}_{\mathcal{I}_1}(\mathbf{h})$  and  $\mathcal{H}_{\mathcal{I}_2}(\mathbf{h})$  are linearly independent for the properly selected scalar  $\theta \in (0, 2\pi)$  for  $\mathbf{h} \neq 0$ . Actually, it can be shown that any column vector of  $\mathcal{H}_{\mathcal{I}_1}(\mathbf{h})$  can not be written as the linear combinations of column vectors of  $\mathcal{H}_{\mathcal{I}_2}(\mathbf{h})$  over  $\Delta\mathcal{A}$ . The scalar  $\theta$  can be properly selected such that the proposed SF code can achieve the optimal PEP performance.

Through the direct calculation in (35), we have two projection matrices,  $\Gamma_{\mathcal{I}_1}$  and  $\Gamma_{\mathcal{I}_2}$ , i.e.,

$$\Gamma_{\mathcal{I}_1} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix}, \Gamma_{\mathcal{I}_2} = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 1 \end{bmatrix}. \quad (100)$$

Thus, the SF code  $\mathbf{C}_{\text{SF}}$  achieves full diversity using the PIC group decoding provided with the grouping scheme  $\{\mathcal{I}_1 = \{0, 1\}, \mathcal{I}_2 = \{2, 3\}\}$ . Actually, while passing the received signal vector  $\mathbf{Y} = (Y_1(0), Y_1(1), Y_1(2))^{\text{mathrm}} T$  through  $\Gamma_{\mathcal{I}_1}$  and  $\Gamma_{\mathcal{I}_2}$ , the optimal detections of  $\mathbf{x}_{\mathcal{I}_1}$  and  $\mathbf{x}_{\mathcal{I}_2}$  are given by

$$\hat{x}_1 = \arg \min_{\bar{\mathbf{x}}_{\mathcal{I}_1} \in \mathcal{A}^2} \left\| \Gamma_{\mathcal{I}_1} \mathbf{Y} - \sqrt{\frac{\rho}{2}} \Gamma_{\mathcal{I}_1} \mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) \bar{\mathbf{x}}_{\mathcal{I}_1} \right\|_{\text{mathrm}} F \quad (101)$$

$$= \arg \min_{\bar{x}_0, \bar{x}_1 \in \mathcal{A}} |Y_1(0) - \sqrt{\frac{\rho}{2}} (\cos \theta H_{1,1}(0) \bar{x}_0 \quad (102)$$

$$+ \sin \theta H_{1,1}(0) \bar{x}_1)|, \quad (103)$$

and

$$\hat{x}_2 = \arg \min_{\bar{\mathbf{x}}_{\mathcal{I}_2} \in \mathcal{A}^2} \left\| \Gamma_{\mathcal{I}_2} \mathbf{Y} - \sqrt{\frac{\rho}{2}} \Gamma_{\mathcal{I}_2} \mathcal{H}_{\mathcal{I}_2}(\mathbf{h}) \bar{\mathbf{x}}_{\mathcal{I}_2} \right\|_{\text{mathrm}} F \quad (104)$$

$$= \arg \min_{\bar{x}_2, \bar{x}_3 \in \mathcal{A}} |Y_1(2) - \sqrt{\frac{\rho}{2}} (\cos \theta H_{2,1}(2) \bar{x}_0 \quad (105)$$

$$- \sin \theta H_{2,1}(2) \bar{x}_3)|. \quad (106)$$

To design an SF code with higher symbol rate, one may consider a code  $\mathbf{C}_{\text{SF}}$  with  $M_t = 2$ ,  $N = 4$  and  $P = 3$ . Then  $\mathbf{C}_{\text{SF}}$  can be designed as

$$\mathbf{C}_{\text{STF}} = \begin{bmatrix} s_{1,1} & 0 \\ s_{2,1} & s_{1,2} \\ s_{3,1} & s_{2,2} \\ 0 & s_{3,2} \end{bmatrix}, \quad (107)$$

where  $\mathbf{s}_i = (s_{i,1}, s_{i,2})^{\text{mathrm}} T = \Theta_2(x_{2(i-1)+1}, x_{2(i-1)+2})^{\text{mathrm}} T$ ,  $\forall i \in \{1, 2, 3\}$ . In this case, the symbol rate is  $3/2$ . Unfortunately, it is easy to check that  $\mathbf{C}_{\text{SF}}$  has no full rank property. In fact, while considering only one receive antenna with  $\mathbf{h} \triangleq [H_{1,1}(0), H_{1,1}(1), H_{1,1}(2), H_{1,1}(3), H_{2,1}(0), H_{2,1}(1), H_{2,1}(2), H_{2,1}(3)]$ , the equivalent channel can be written as

$$\mathcal{H}(\mathbf{h}) = [\mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_2}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_3}(\mathbf{h})], \quad (108)$$

where

$$\mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) = \begin{bmatrix} \cos \theta H_{1,1}(0) & \sin \theta H_{1,1}(0) \\ -\sin \theta H_{2,1}(1) & \cos \theta H_{2,1}(1) \\ 0 & 0 \\ 0 & 0 \end{bmatrix},$$

$$\mathcal{H}_{\mathcal{I}_2}(\mathbf{h}) = \begin{bmatrix} 0 & 0 \\ \cos \theta H_{1,1}(1) & \sin \theta H_{1,1}(1) \\ -\sin \theta H_{2,1}(2) & \cos \theta H_{2,1}(2) \\ 0 & 0 \end{bmatrix},$$

and

$$\mathcal{H}_{\mathcal{I}_3}(\mathbf{h}) = \begin{bmatrix} 0 & 0 \\ 0 & 0 \\ \cos \theta H_{1,1}(2) & \sin \theta H_{1,1}(2) \\ -\sin \theta H_{2,1}(3) & \cos \theta H_{2,1}(3) \end{bmatrix}.$$

It is obvious that  $\mathcal{H}_{\mathcal{I}_1}(\mathbf{h})$ ,  $\mathcal{H}_{\mathcal{I}_2}(\mathbf{h})$ , and  $\mathcal{H}_{\mathcal{I}_3}(\mathbf{h})$  are not linearly independent for any  $\theta \in (0, 2\pi)$ . Thus, this code  $\mathbf{C}_{\text{STF}}$  can not achieve full diversity using the PIC group decoding provided with the grouping scheme  $\{\mathcal{I}_1 = \{0, 1\}, \mathcal{I}_2 = \{2, 3\}, \mathcal{I}_3 = \{4, 5\}\}$ . In order to decode with this grouping scheme with the low-complexity receiver, we implement the conditional PIC group decoding. First of all, any two group of column vectors in  $\{\mathcal{H}_{\mathcal{I}_i}(\mathbf{h}): i \in \{1, 2, 3\}\}$ , say  $\mathcal{H}_{\mathcal{I}_1}(\mathbf{h})$  and  $\mathcal{H}_{\mathcal{I}_2}(\mathbf{h})$ , can be used for PIC decoding for any possible trial of the information symbols in the remaining group, say  $\mathbf{x}_{\mathcal{I}_3}$ , since  $\mathcal{H}_{\mathcal{I}_1}(\mathbf{h})$  and  $\mathcal{H}_{\mathcal{I}_2}(\mathbf{h})$  are linearly independent except for  $\mathcal{H}_{\mathcal{I}_3}$  whenever  $\mathbf{h} \neq 0$  and  $\tan \theta \neq 0$ . Namely, taking the PIC decoding for the grouping scheme  $\{\mathbf{x}_{\mathcal{I}_1}, \mathbf{x}_{\mathcal{I}_2}\}$  with respect to any possible trial of information symbols  $\bar{\mathbf{x}}_{\mathcal{I}_3} \in \mathcal{A}^2$ , we should cancel them from the received signal, i.e.,

$$\mathbf{Y} - \sqrt{\frac{\rho}{2}} \mathcal{H}_{\mathcal{I}_3}(\mathbf{h}) \bar{\mathbf{x}}_{\mathcal{I}_3} \quad (109)$$

$$= \sqrt{\frac{\rho}{2}} \sum_{i=1}^2 \mathcal{H}_{\mathcal{I}_i}(\mathbf{h}) \mathbf{x}_{\mathcal{I}_i} + \sqrt{\frac{\rho}{2}} \mathcal{H}_{\mathcal{I}_3}(\mathbf{h}) (\mathbf{x}_{\mathcal{I}_3} - \bar{\mathbf{x}}_{\mathcal{I}_3}) + N. \quad (110)$$

After that we choose  $\bar{\mathbf{x}}_{\mathcal{I}_3} \in \mathcal{A}^2$  to minimize the ML metric from all yielded signals  $\{\mathbf{x}_{\mathcal{I}_1}, \mathbf{x}_{\mathcal{I}_2}\}$ ,

$$\mathbf{x}_{\mathcal{I}_3} = \arg \min_{\bar{\mathbf{x}}_{\mathcal{I}_3} \in \mathcal{A}^2} \left\| \mathbf{Y} - \sqrt{\frac{\rho}{2}} \left( \sum_{i=1}^2 \mathcal{H}_{\mathcal{I}_i} \mathbf{x}_{\mathcal{I}_i} + \mathcal{H}_{\mathcal{I}_3} \bar{\mathbf{x}}_{\mathcal{I}_3} \right) \right\|_{\text{F}}. \quad (111)$$

According the above analysis, we state that the decoding complexity of the PIC decoding for two subsets  $\mathbf{x}_{\mathcal{I}_1}$  and  $\mathbf{x}_{\mathcal{I}_2}$  is  $\mathcal{O}(2|\mathcal{A}|^2)$ , and the ML decoding for subset  $\mathbf{x}_{\mathcal{I}_3}$  is  $\mathcal{O}(|\mathcal{A}|^2)$ . Therefore, the total decoding complexity for this conditional PIC decoding is  $\mathcal{O}(2|\mathcal{A}|^4)$ , which is still lower than the decoding complexity  $\mathcal{O}(|\mathcal{A}|^6)$  of  $\mathbf{x} \in \mathcal{A}^6$  with the joint ML decoding.

To design an SF code with the PIC decoding, we can also make use of the design approach of the conventional quasi-orthogonal STBC codes.

*Example 4.4:* Consider the quasi-orthogonal STBC code with  $M_t = 4$ ,  $M_r = 1$ ,  $N = 4$  and  $P = 2$ . Then the SF code can be designed as

$$\mathbf{C}_{\text{SF}} = \begin{bmatrix} s_{1,1} & s_{2,1} & \cos \theta s_{1,2} & \sin \theta s_{2,2} \\ -s_{2,1}^* & s_{1,1}^* & -\sin \theta s_{2,2}^* & \cos \theta s_{1,2}^* \\ \cos \theta s_{1,2} & \sin \theta s_{2,2} & s_{1,1} & s_{2,1} \\ -\sin \theta s_{2,2}^* & \cos \theta s_{1,2}^* & -s_{2,1}^* & s_{1,1}^* \end{bmatrix}, \quad (112)$$

where  $\mathbf{s}_i = (s_{i,1}, s_{i,2})^{\langle \text{mathrm} \rangle} T = (x_{2(i-1)}, x_{2(i-1)+1})^{\langle \text{mathrm} \rangle} T$ ,  $\forall i \in \{1, 2\}$  and  $\theta \in (0, 2\pi)$ . Let  $\mathbf{h} = [H_{1,1}^{\langle \text{mathrm} \rangle} T, H_{2,1}^{\langle \text{mathrm} \rangle} T, H_{3,1}^{\langle \text{mathrm} \rangle} T, H_{4,1}^{\langle \text{mathrm} \rangle} T]^{\langle \text{mathrm} \rangle} T$ , where  $H_{t,1} = [H_{t,1}^{\langle \text{mathrm} \rangle} T(0), H_{t,1}^{\langle \text{mathrm} \rangle} T(1), H_{t,1}^{\langle \text{mathrm} \rangle} T(2), H_{t,1}^{\langle \text{mathrm} \rangle} T(3)]$ ,  $\forall t \in \{1, 2, 3, 4\}$  with the grouping scheme  $\mathcal{I} = \{\mathcal{I}_1, \mathcal{I}_2\} = \{\{0, 2\}, \{1, 3\}\}$ . Then the equivalent channel matrix can be written as

$$\mathcal{H}(\mathbf{h}) = [\mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_2}(\mathbf{h})], \quad (113)$$

where

$$\mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) = \begin{bmatrix} H_{1,1}(0) & \cos \theta H_{3,1}(0) \\ H_{2,1}^*(1) & \cos \theta H_{4,1}^*(1) \\ H_{3,1}(2) & \cos \theta H_{1,1}(2) \\ H_{4,1}^*(3) & \cos \theta H_{2,1}^*(3) \end{bmatrix}$$

and

$$\mathcal{H}_{\mathcal{I}_2}(\mathbf{h}) = \begin{bmatrix} H_{2,1}(0) & \sin \theta H_{4,1}(0) \\ -H_{1,1}^*(1) & -\sin \theta H_{3,1}(1) \\ H_{4,1}(2) & \sin \theta H_{2,1}(2) \\ -H_{3,1}^*(3) & -\sin \theta H_{1,1}^*(3) \end{bmatrix}.$$

It is obvious that  $\mathcal{H}_{\mathcal{I}_1}(\mathbf{h})$  and  $\mathcal{H}_{\mathcal{I}_2}(\mathbf{h})$  are linear independent for  $\tan \theta \neq 0$  and  $\mathbf{h} \neq 0$ . Therefore,  $\mathbf{C}_{\text{SF}}$  achieves full diversity under the PIC group decoding provided with the grouping scheme  $\{\mathcal{I}_1 = \{0, 1\}, \mathcal{I}_2 = \{2, 3\}\}$ .

### 4.3 The STF Block Codes with Multi-layer Structure

*Example 4.5:* Taking  $M_t = 4$ ,  $M_r = 1$ ,  $M_b = 2$  and  $N = 3$ , we design an STF code with the Alamouti code structure as follows

$$\mathbf{C}_{\langle \text{mathrm} \rangle \text{STF}} = \begin{bmatrix} \mathbf{C}_{\langle \text{mathrm} \rangle \text{SF} 1} & \mathbf{C}_{\langle \text{mathrm} \rangle \text{SF} 2} \\ -\mathbf{C}_{\langle \text{mathrm} \rangle \text{SF} 2}^* & \mathbf{C}_{\langle \text{mathrm} \rangle \text{SF} 1}^* \end{bmatrix} \quad (114)$$

where  $\mathbf{C}_{\langle \text{mathrm} \rangle \text{SF} 1}$  and  $\mathbf{C}_{\langle \text{mathrm} \rangle \text{SF} 2}$  are two SF codes defined in (97), i.e.,

$$\mathbf{C}_{\text{STF}1} = \begin{bmatrix} s_{1,1} & 0 \\ s_{2,1} & s_{1,2} \\ 0 & s_{2,2} \end{bmatrix}, \mathbf{C}_{\text{STF}2} = \begin{bmatrix} s_{3,1} & 0 \\ s_{4,1} & s_{3,2} \\ 0 & s_{4,2} \end{bmatrix}. \quad (115)$$

Thus the equivalent channel can be written as

$$\mathcal{H}(\mathbf{h}) = [\mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_2}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_3}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_4}(\mathbf{h})], \quad (116)$$

where

$$\mathcal{H}_{\mathcal{I}_1} = \begin{bmatrix} H_{1,1}(0) & 0 \\ 0 & H_{2,1}(1) \\ 0 & 0 \\ H_{3,1}^*(3) & 0 \\ 0 & H_{4,1}^*(4) \\ 0 & 0 \end{bmatrix}, \mathcal{H}_{\mathcal{I}_2} = \begin{bmatrix} 0 & 0 \\ H_{1,1}(1) & 0 \\ 0 & H_{2,1}(2) \\ 0 & 0 \\ H_{3,1}^*(4) & 0 \\ 0 & H_{4,1}^*(5) \end{bmatrix}, \quad (117)$$

$$\mathcal{H}_{\mathcal{I}_3} = \begin{bmatrix} H_{3,1}(0) & 0 \\ 0 & H_{4,1}(0) \\ 0 & 0 \\ -H_{1,1}^*(3) & 0 \\ 0 & -H_{2,1}^*(4) \\ 0 & 0 \end{bmatrix}, \mathcal{H}_{\mathcal{I}_4} = \begin{bmatrix} 0 & 0 \\ H_{3,1}(1) & 0 \\ 0 & H_{4,1}(2) \\ 0 & 0 \\ -H_{1,1}^*(4) & 0 \\ 0 & -H_{2,1}^*(5) \end{bmatrix}. \quad (118)$$

It is obvious that any three group vectors

$$\{\mathcal{H}_{\mathcal{I}_k}(\mathbf{h}), \mathcal{H}_{\mathcal{I}_m}(\mathbf{h}), \mathcal{H}_{\mathcal{I}_n}(\mathbf{h})\}, \forall k, m, n \in \{1, 2, 3, 4\}$$


are linearly independent for  $\mathbf{h} \neq 0$ . Namely, any one vector of one group vectors, say  $\mathcal{H}_{\mathcal{I}_k}(\mathbf{h})$ , can not belong to the linear space spanned by all vectors in other two group vectors,  $\mathcal{H}_{\mathcal{I}_m}(\mathbf{h})$  and  $\mathcal{H}_{\mathcal{I}_n}(\mathbf{h})$ . However, four group vectors  $\{\mathcal{H}_{\mathcal{I}_1}(\mathbf{h}), \mathcal{H}_{\mathcal{I}_2}(\mathbf{h}), \mathcal{H}_{\mathcal{I}_3}(\mathbf{h}), \mathcal{H}_{\mathcal{I}_4}(\mathbf{h})\}$  are not linearly independent since any one vector of one group vectors, say  $\mathcal{H}_{\mathcal{I}_1}(\mathbf{h})$ , belongs to the linear space spanned by all vectors in other three group vectors,  $\mathcal{H}_{\mathcal{I}_2}(\mathbf{h})$ ,  $\mathcal{H}_{\mathcal{I}_3}(\mathbf{h})$  and  $\mathcal{H}_{\mathcal{I}_4}(\mathbf{h})$ . Thus, the code  $\mathbf{C}_{\text{STF}}$  in (114) can not achieve full diversity using the PIC group decoding provided with the grouping scheme  $\mathcal{I}_i = \{2i - 2, 2i - 1\}$ ,  $\forall i \in \{1, 2, 3, 4\}$ . Fortunately, any two group vectors in  $\{\mathcal{H}_{\mathcal{I}_1}(\mathbf{h}), \mathcal{H}_{\mathcal{I}_2}(\mathbf{h}), \mathcal{H}_{\mathcal{I}_3}(\mathbf{h}), \mathcal{H}_{\mathcal{I}_4}(\mathbf{h})\}$  are linearly independent for  $\mathbf{h} \neq 0$ . For example,  $\{\mathcal{H}_{\mathcal{I}_1}(\mathbf{h}), \mathcal{H}_{\mathcal{I}_3}(\mathbf{h})\}$  and  $\{\mathcal{H}_{\mathcal{I}_2}(\mathbf{h}), \mathcal{H}_{\mathcal{I}_4}(\mathbf{h})\}$  are linearly independent for  $\mathbf{h} \neq 0$ . It implies that any one vector of the space spanned by two group vectors,  $\mathcal{H}_{\mathcal{I}_1}(\mathbf{h})$  and  $\mathcal{H}_{\mathcal{I}_3}(\mathbf{h})$ , does not belong to the linear space spanned by all vectors other two group vectors,  $\mathcal{H}_{\mathcal{I}_2}(\mathbf{h})$  and  $\mathcal{H}_{\mathcal{I}_4}(\mathbf{h})$ . Thus, this code  $\mathbf{C}_{\text{STF}}$  can achieve full diversity using the PIC group decoding provided that the grouping scheme  $\{\mathcal{I}_1 = \{0, 1, 4, 5\}, \mathcal{I}_2 = \{2, 3, 6, 7\}\}$ .

#### 4.4 Simulation Results


So far, we have investigated the structure of the SF/STF codes with the PIC decoding. Next we show some simulation results for the proposed SF/STF codes for different modulations and compare their BER performance versus SNR. The OFDM modulation has  $N = 128$  subcarriers and the number of independent channel taps is  $L = 12$ .

At first, we compare the STF code in (83) using BPSK constellation with two transmit and one receive antennas for 2 OFDM blocks. For the ML decoding, ZF decoding and PIC decoding, the grouping size of the decoders is two. The rate for this coding scheme is 1 for two transmit antennas. It is shown in Fig.1 that the proposed STF code can achieve full diversity with

the BPSK constellation. In this case, the BER performance behavior is almost same for three kinds of the decoding approaches.

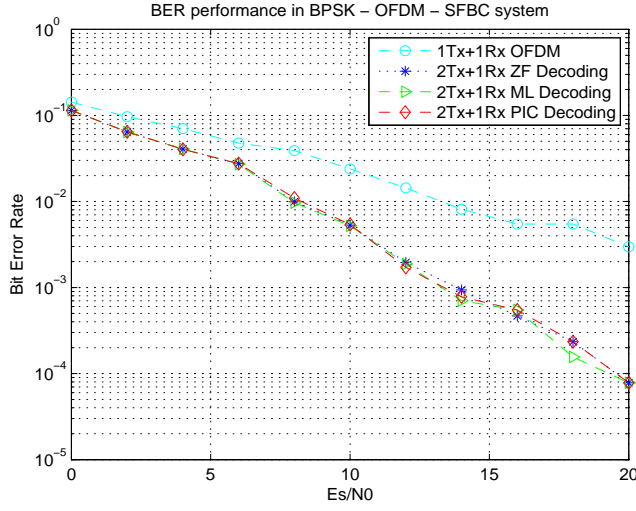

**Figure 1.** BER performance behaviors of the STF code with BPSK modulation.

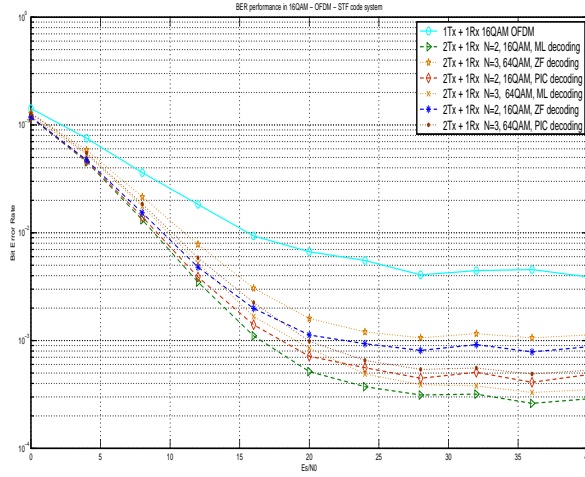

**Figure 2.** BER performance behaviors of the STF code with 16-QAM and 64-QAM modulation.

In Fig.2, we compare our codes in (83) and (97) using the standard complex quadrature amplitude modulation (QAM) constellations, such as 16-QAM, 64-QAM, and 256-QAM. For the STF code in (97), the group size of the group decoder is set to two. The rate for this STF coding scheme is  $4/3$ . For the optimal coding gain based on the standard QAM constellation,

we select the parameter  $\theta = 0.55$  based on Monte Carlo simulations for the optimal STBC design in terms of the two-dimensional real rotation  $\theta = \frac{1}{2} \tan^{-1}(2)$  [Xia09]. It is shown in Fig.2 that the proposed SF code can achieve full diversity with three different QAM modulations. In this case, the BER performance behaviors of two STF coding schemes are almost same for 16-QAM and 64-QAM. In addition, it implies that the BER performance of the PIC decoding outperforms the ZF decoding, but no better than that of the ML decoding.

## 5 Conclusion

In this paper, we have presented the PIC group decoding for the SF/STF codes to achieve full diversity when signals are transmitted and processed by a linear receiver in a frequency-selective environment. The proposed PIC decoding fills the gaps between the ML decoding and the ZF decoding. We then derived a design criterion for the SF/STF codes to achieve full diversity with the PIC decoding in terms of the PEP performance. The derived criterion is a group independence criterion for an equivalent channel matrix for the MIMO-OFDM system. It provides a tradeoff between decoding complexity and symbol rate while full diversity is required. Specifically, we proposed the linear SF/STF code achieving full diversity for the MIMO-OFDM system, which satisfies the PIC group decoding criterion. While consider the design of the high symbol rate SF/STF codes, we present an example with the multi-layer structure that satisfies the newly-built design PIC group decoding criterion and thus they achieve full diversity with the PIC group decoding. We have shown that it contains an interesting property for such SF/STC codes, i.e., the symbol transmission rate for the code is usually more than one for the STF codes with the multi-layer structure. Simulations demonstrate that the proposed SF/STF codes perform well in terms of the PEP performance as well as the decoding complexity when the PIC group decoding is applied at the receiver.

## Appendix

### 1 Proof of Theorem 3.1

For any given non-zero vectors  $\mathbf{h} \in \mathbb{C}^{NM_t M_r M_b}$ ,  $\mathbf{h}' \in \mathbb{C}^{LM_t M_r M_b}$  and  $\Delta \mathbf{x} \in \mathcal{A}^\eta$ , the  $\eta$  column vectors of  $\mathcal{H}(\mathbf{h})$  and hence  $\mathcal{H}(\mathbf{h}')$  are linearly independent over  $\Delta \mathcal{A}$ . Then there exists a positive constant  $c$  such that

$$\begin{aligned} \frac{1}{\|\mathbf{h}\|_{(\text{mathrm})}^F} \mathcal{H}(\mathbf{h}) \Delta \mathbf{x} \|_{(\text{mathrm})}^F &= \left\| \left[ \mathbf{A}_1 \frac{\mathbf{h}}{\|\mathbf{h}\|_{(\text{mathrm})}^F} \cdots \mathbf{A}_\eta \frac{\mathbf{h}}{\|\mathbf{h}\|_{(\text{mathrm})}^F} \right] \Delta \mathbf{x} \right\|_{(\text{mathrm})}^F \quad (119) \\ &\geq c \cdot \|\Delta \mathbf{x}\|_{(\text{mathrm})}^F > 0. \quad (120) \end{aligned}$$

Consequently, we have

$$\|\mathcal{H}(\mathbf{h}) \Delta \mathbf{x}\|_{\langle \text{mathrm} \rangle F} \geq c \cdot \|\Delta \mathbf{x}\|_{\langle \text{mathrm} \rangle F} \|\mathbf{h}\|_{\langle \text{mathrm} \rangle F} \quad (121)$$

$$= c \cdot \|\Delta \mathbf{x}\|_{\langle \text{mathrm} \rangle F} \cdot \left[ \sum_{k=1}^{M_b} \sum_{n=0}^{N-1} \sum_{i=1}^{M_t} \sum_{j=1}^{M_r} |H_{i,j}^k(n)|^2 \right]^{1/2} \quad (122)$$

$$= c \cdot \|\Delta \mathbf{x}\|_{\langle \text{mathrm} \rangle F} \cdot \left[ \sum_{k=1}^{M_b} \sum_{l=0}^{L-1} \sum_{i=1}^{M_t} \sum_{j=1}^{M_r} |\alpha_{i,j}^k(l)|^2 \right]^{1/2}. \quad (123)$$

This completes the proof of this theorem.

## 2 Proof of Theorem 3.2

For any two distinct dispersions  $\mathbf{X}, \tilde{\mathbf{X}} \in \mathcal{X}$  with  $\Delta \mathbf{X} = \mathbf{X} - \tilde{\mathbf{X}} \in \Delta \mathcal{X}$ , it is assumed that  $\Delta \mathbf{X}$  is a full rank matrix. Then there exist unitary matrix  $\mathbf{U}$  of size  $N M_r M_b \times N M_r M_b$  and diagonal matrix  $\mathbf{D} = \text{diag}(\lambda_1, \dots, \lambda_{N M_r M_b})$  such that

$$\Delta \mathbf{X} \Delta \mathbf{X}^{\langle \text{mathrm} \rangle H} = \mathbf{U} \mathbf{D} \mathbf{U}^{\langle \text{mathrm} \rangle H}.$$

Due to the full rank property of matrix  $\Delta \mathbf{X}$ , there exists positive value  $\lambda_0$  such that  $\lambda_0 = \min \{\lambda_1, \dots, \lambda_{N M_r M_b}\}$ . Therefore we have

$$\|\mathcal{H}(\mathbf{h}) \Delta \mathbf{x}\|_{\langle \text{mathrm} \rangle F^2} = \|\Delta \mathbf{X} \mathbf{h}\|_{\langle \text{mathrm} \rangle F^2} \quad (124)$$

$$= \text{tr}(\Delta \mathbf{X} \mathbf{h} \mathbf{h}^{\langle \text{mathrm} \rangle H} \Delta \mathbf{X}^{\langle \text{mathrm} \rangle H}) \quad (125)$$

$$= \text{tr}(\Delta \mathbf{X} \Delta \mathbf{X}^{\langle \text{mathrm} \rangle H} \mathbf{h} \mathbf{h}^{\langle \text{mathrm} \rangle H}) \quad (126)$$

$$\geq \lambda_0 \sum_{k=1}^{M_b} \sum_{n=0}^{N-1} \sum_{i=1}^{M_t} \sum_{j=1}^{M_r} |H_{i,j}^k(n)|^2. \quad (127)$$

It shows that for  $\mathbf{h} \neq 0$ ,  $\mathcal{H}(\mathbf{h}) \Delta \mathbf{x} = 0$  if and only if  $\Delta \mathbf{x} = 0$ . Thus all  $\eta$  column vectors of  $\mathcal{H}(\mathbf{h})$  are linearly independent over  $\Delta \mathcal{A}$ .

For the proof of the necessity, if the column vectors of  $\mathcal{H}(\mathbf{h})$  are linearly independent over  $\Delta \mathcal{A}$ , there exists a positive constant  $c$  such that

$$\|\Delta \mathbf{X} \mathbf{h}\|_{\langle \text{mathrm} \rangle F^2} = \|\mathcal{H}(\mathbf{h}) \Delta \mathbf{x}\|_{\langle \text{mathrm} \rangle F^2}^2 \quad (128)$$

$$= \text{tr}(\mathcal{H}(\mathbf{h}) \Delta \mathbf{x} \Delta \mathbf{x}^{\langle \text{mathrm} \rangle H} \mathcal{H}(\mathbf{h})^{\langle \text{mathrm} \rangle H}) \quad (129)$$

$$= \text{tr}(\mathcal{H}(\mathbf{h}) \mathcal{H}(\mathbf{h})^{\langle \text{mathrm} \rangle H} \Delta \mathbf{x} \Delta \mathbf{x}^{\langle \text{mathrm} \rangle H}) \quad (130)$$

$$\geq c \|\Delta \mathbf{x}\|_F^2 \sum_{k=1}^{M_b} \sum_{n=0}^{N-1} \sum_{i=1}^{M_t} \sum_{j=1}^{M_r} |H_{i,j}^k(n)|^2. \quad (131)$$

Thus the eigenvalues of  $\Delta \mathbf{X} \Delta \mathbf{X}^{\langle \text{mathrm} \rangle H}$  are all positive values for any pair of  $\mathbf{C}$  and  $\tilde{\mathbf{C}}$ . It implies that  $\mathcal{X}$  has the full rank property. This completes the proof of the Theorem.



### 3 Proof of Theorem 3.3

We consider the dimension-reduced system in (49). Suppose the  $\eta$  column vectors in  $\mathcal{H}(\mathbf{h})$  are linearly independent. Thus the  $\eta_p$  column vectors  $\mathcal{H}_{\mathcal{I}_p}(\mathbf{h})$  are linearly independent for any  $p \in \{1, \dots, P\}$ . According to the selection of matrix  $\Gamma_{\mathcal{I}_p}(\mathbf{h})$  in (35), the resulting  $\eta_p$  column vectors  $\Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_p}(\mathbf{h})$  are linearly independent over  $\Delta \mathbf{x}_{\mathcal{I}_p}$ . Then we have

$$\frac{1}{\|\mathbf{h}\|_{\langle \text{mathrm} \rangle F}} \Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_p}(\mathbf{h}) \quad (132)$$

$$= \Gamma_{\mathcal{I}_p}(\mathbf{h}) \left[ \frac{1}{\|\mathbf{h}\|_{\langle \text{mathrm} \rangle F}} \mathcal{H}_{\mathcal{I}_p}(\mathbf{h}) \right] \quad (133)$$

$$= \Gamma_{\mathcal{I}_p}(\mathbf{h}) \left[ \mathbf{A}_{\mathcal{I}_p,1} \frac{\mathbf{h}}{\|\mathbf{h}\|_{\langle \text{mathrm} \rangle F}} \cdots \mathbf{A}_{\mathcal{I}_p,\eta_p} \frac{\mathbf{h}}{\|\mathbf{h}\|_{\langle \text{mathrm} \rangle F}} \right] \quad (134)$$

$$= \Gamma_{\mathcal{I}_p} \left( \frac{\mathbf{h}}{\|\mathbf{h}\|_{\langle \text{mathrm} \rangle F}} \right) \mathcal{H}_{\mathcal{I}_p} \left( \frac{\mathbf{h}}{\|\mathbf{h}\|_{\langle \text{mathrm} \rangle F}} \right). \quad (135)$$

The last equality holds since  $\Gamma_{\mathcal{I}_p}(\mathbf{h}) = \Gamma_{\mathcal{I}_p} \left( \frac{\mathbf{h}}{\|\mathbf{h}\|_{\langle \text{mathrm} \rangle F}} \right)$ , which is a direct result of design of matrix  $\Gamma_{\mathcal{I}_p}(\mathbf{h})$ . Then there exists a positive constant  $c$  such that

$$\left\| \frac{1}{\|\mathbf{h}\|_{\langle \text{mathrm} \rangle F}} \Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_p}(\mathbf{h}) \Delta \mathbf{x}_{\mathcal{I}_p} \right\|_{\langle \text{mathrm} \rangle F} \quad (136)$$

$$= \left\| \Gamma_{\mathcal{I}_p} \left( \frac{\mathbf{h}}{\|\mathbf{h}\|_{\langle \text{mathrm} \rangle F}} \right) \mathcal{H}_{\mathcal{I}_p} \left( \frac{\mathbf{h}}{\|\mathbf{h}\|_{\langle \text{mathrm} \rangle F}} \right) \Delta \mathbf{x} \right\|_{\langle \text{mathrm} \rangle F} \quad (137)$$

$$\geq c \cdot \|\Delta \mathbf{x}_{\mathcal{I}_p}\|_{\langle \text{mathrm} \rangle F} > 0. \quad (138)$$

Consequently, we have

$$\left\| \Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_p}(\mathbf{h}) \Delta \mathbf{x}_{\mathcal{I}_p} \right\|_{\langle \text{mathrm} \rangle F} \quad (139)$$

$$\geq c \cdot \|\Delta \mathbf{x}_{\mathcal{I}_p}\|_{\langle \text{mathrm} \rangle F} \cdot \|\mathbf{h}\|_{\langle \text{mathrm} \rangle F} \quad (140)$$

$$= c \cdot \|\Delta \mathbf{x}_{\mathcal{I}_p}\|_{\langle \text{mathrm} \rangle F} \cdot \left[ \sum_{k=1}^{M_b} \sum_{n=0}^{N-1} \sum_{i=1}^{M_t} \sum_{j=1}^{M_r} |H_{i,j}^k(n)|^2 \right]^{1/2} \quad (141)$$

$$= c \cdot \|\Delta \mathbf{x}_{\mathcal{I}_p}\|_{\langle \text{mathrm} \rangle F} \cdot \left[ \left( \sum_{k=1}^{M_b} \sum_{l=0}^{L-1} \sum_{i=1}^{M_t} \sum_{j=1}^{M_r} |\alpha_{i,j}^k(l)|^2 \right) \right]^{1/2}. \quad (142)$$

Thus the dimension-reduced system in (49) has power gain order  $L M_t M_r M_b$ .

To prove the necessity, we firstly suppose one of  $\eta_p$  column vectors  $\mathcal{H}_{\mathcal{I}_p}(\mathbf{h})$  can be written as linear combination of  $\eta - \eta_p$  column vectors  $\{\mathcal{H}_{\mathcal{I}_q}(\mathbf{h}) : p \neq q\}$ . Then there exists a column vector, say one column  $\mathcal{H}_{\mathcal{I}_{p,1}}(\mathbf{h}) = \mathbf{A}_{\mathcal{I}_{p,1}} \mathbf{h}$  of  $\mathcal{H}_{\mathcal{I}_p}(\mathbf{h})$  such that

$$\Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_p}(\mathbf{h}) \quad (143)$$

$$= [0 \ \Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_{p,2}}(\mathbf{h}) \cdots \Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_{p,\eta_p}}(\mathbf{h})] \quad (144)$$

$$= [0 \ \Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathbf{A}_{\mathcal{I}_{p,2}} \mathbf{h} \cdots \Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathbf{A}_{\mathcal{I}_{p,\eta_p}} \mathbf{h}]. \quad (145)$$

Taking  $\Delta \mathbf{x}_{\mathcal{I}_p} = [c, 0, \dots, 0] \langle \text{mathrm} \rangle T \in \mathcal{A}^{\eta_p}$  for  $0 \neq c \in \Delta \mathcal{A}$ , we have

$$\|\Gamma_{\mathcal{I}_p}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_p}(\mathbf{h}) \Delta \mathbf{x}_{\mathcal{I}_p}\| \langle \text{mathrm} \rangle F = 0,$$

which contradicts with the condition that the dimension-reduced system in (49) has power gain order  $L M_t M_r M_b$ . It shows that all column vectors  $\mathcal{H}_{\mathcal{I}_p}(\mathbf{h})$  do not belong to the linear space spanned by column vectors  $\{\mathcal{H}_{\mathcal{I}_q}(\mathbf{h}): p \neq q\}$ . Secondly, if  $0 \neq \Delta \mathbf{x} \in \mathcal{A}^\eta$ , then there is at least  $0 \neq \Delta \mathbf{x}_{\mathcal{I}_p} \in \mathcal{A}^{\eta_p}$ . We assume  $\Delta \mathbf{x}_{\mathcal{I}_1} \in \mathcal{A}^{\eta_1} \neq 0$  without loss of generality. Then for any  $\mathbf{h} \neq 0$  there exists a positive constant  $c$  such that

$$\|\Delta \mathbf{X} \mathbf{h}\| \langle \text{mathrm} \rangle F^2 = \|\mathcal{H}(\mathbf{h}) \Delta \mathbf{x}\| \langle \text{mathrm} \rangle F^2 \quad (146)$$

$$= \|\mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) \Delta \mathbf{x}_{\mathcal{I}_1} + \sum_{p=2}^P \mathcal{H}_{\mathcal{I}_p}(\mathbf{h}) \Delta \mathbf{x}_{\mathcal{I}_p}\| \langle \text{mathrm} \rangle F^2 \quad (147)$$

$$= \|\Gamma_{\mathcal{I}_1}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) \Delta \mathbf{x}_{\mathcal{I}_1}\| \langle \text{mathrm} \rangle F^2 + \|\mathbf{Q}_{\mathcal{I}_1}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) \Delta \mathbf{x}_{\mathcal{I}_1}\| + \quad (148)$$

$$\sum_{p=2}^P \mathcal{H}_{\mathcal{I}_p}(\mathbf{h}) \Delta \mathbf{x}_{\mathcal{I}_p}\| \langle \text{mathrm} \rangle F^2 \quad (149)$$

$$\geq \|\Gamma_{\mathcal{I}_1}(\mathbf{h}) \mathcal{H}_{\mathcal{I}_1}(\mathbf{h}) \Delta \mathbf{x}_{\mathcal{I}_1}\| \langle \text{mathrm} \rangle F^2 \quad (150)$$

$$\geq c \cdot \left[ \sum_{k=1}^{M_b} \sum_{l=0}^{L-1} \sum_{i=1}^{M_t} \sum_{j=1}^{M_r} |\alpha_{i,j}^k(l)|^2 \right] \|\Delta \mathbf{x}_{\mathcal{I}_1}\| \langle \text{mathrm} \rangle F^2 > 0 \quad (151)$$

It shows that the matrix  $\Delta \mathbf{X}$  has the full rank property. This completes the proof of this theorem.

#### 4 Proof of Theorem 3.4

Based on the formula in (70), we have  $\text{rank} \mathbf{K}_s = \min_{i \in \mathcal{I}} \{\mathbf{A}_i \mathbf{A}_i^H \circ (R_b \otimes R)\}$ , where matrix  $\mathbf{A}_i$  has the size  $N M_b \times M_t$  for  $i \in \mathcal{I}$ . According to the rank properties of Hadamard products and Keronecker products, we obtain

$$\text{rank}(\mathbf{A}_i \mathbf{A}_i^H \circ (R_b \otimes R)) \leq \text{rank}(\mathbf{A}_i \mathbf{A}_i^H) \text{rank}((R_b) \text{rank}(R)).$$

We observe that the rank of  $\mathbf{A}_i \mathbf{A}_i^H$  is upper bounded by  $\min \{N M_b, M_t\}$ , and the rank of  $R$  is upper bounded by  $L$ . Therefore, the maximum achievable diversity is at most  $M_r \min \{L M_t \text{rank}(R_b), N M_b\}$ . In a case of the SF code, we have  $\text{rank}(R_b) = 1$ , and then complete the proof of this theorem.

#### Acknowledgements

The authors thank Prof. Xiang-Gen Xia for his valuable motivations to improve this paper. This work was supported by the National Natural Science Foundation of China (60902044) and World Class University R32- 2008-000-20014-0 NRF, Korea.

## Bibliography

- [Tarokh04] V. Tarokh, N. Seshadri, and A. R. Calderbank, Space-time codes for high data rate wireless communication: Performance criterion and code construction, *IEEE Trans. Inf. Theory*, vol. 44, no. 3, pp. 744-765, Mar. 1998.
- [Tarokh991] H. Jafarkhani, A Quasi-Orthogonal Space-Time Block Code, *IEEE Trans. Commun.*, Vol. 49, No.1, pp. 1-4, Jan. 2001
- [Alamouti99] S. M. Alamouti, A simple transmit diversity technique for wireless communication, *IEEE J. Sel. Areas Commun.*, vol. 16, no. 10, pp. 1451-1458, Oct. 1998.
- [Xia09] X. Guo and X.-G. Xia, On full diversity space-time block codes with partial interference cancellation group decoding, *IEEE Trans. Inf. Theory*, vol. 55, pp. 4366-4385, Oct. 2009.
- [Zhang04] W. Zhang, X.-G. Xia, and K. B. Letaief, Space-time/frequency coding for MIMO-OFDM in next generation broadband wireless systems, *IEEE Wireless Commun. Mag.*, vol. 14, no. 6, pp. 32-43, Jun. 2007.
- [Gong04] Y. Gong and K. B. Letaief, An efficient space-frequency coded OFDM system for broadband wireless communications, *IEEE Trans. Commun.*, vol. 51, no. 12, pp. 2019-2029, Dec. 2003.
- [Su04] W. Su, Z. Safar, M. Olfat, and K. J. R. Liu, Abtaining full-diversity space-frequency codes from space-time codes via mapping, *IEEE Trans. Signal Process.*, vol. 51, no. 11, pp. 2905-2916, Nov. 2003.
- [Su05] W. Su, Z. Safar, and K. J. R. Liu, Full-rate full-diversity space-frequency codes with optimum coding advantage, *IEEE Trans. Inf. Theory*, vol. 51, no. 1, pp. 229-249, Jan. 2005.
- [Zhang05] W. Zhang, X.-G. Xia, and P. C. Ching, High-rate full-diversity space-time-frequency codes for broadband MIMO block-fading channels, *IEEE Trans. Commun.*, vol. 55, no. 1, pp. 25-34, Jan. 2007. [Zhang07] W. Zhang, X.-G. Xia, and P. C. Ching, Full-diversity and fast ML decoding properties of general orthogonal space-time block codes for MIMO-OFDM systems, *IEEE Trans. Wireless Commun.*, vol. 6, no. 5, pp. 1647-1653, May 2007.
- [Gong526] Y. Gong and K. B. Letaief, Space-frequency-time coded OFDM for broadband wireless communications, in *Proc. IEEE GLOBECOM*, San Antonio, Texas, 2001, pp. 519-523.
- [GongLiu] Z. Liu, Y. Xin, and G. B. Giannakis, Space-time-frequency coded OFDM over frequency-selective fading channels, *IEEE Trans. Signal Process.*, vol. 50, no. 10, pp. 2465-2476, Oct. 2002.
- [Wang26] B. Lu, X. Wang, and K. R. Narayanan, LDPC-based space-time coded OFDM systems over correlated fading channels: Performance analysis and receiver design, *IEEE Trans. Commun.*, vol. 50, pp. 74-88, Jan. 2002.
- [GSu526] W. Su, Z. Safar, and K. J. R. Liu, Towards maximum achievable diversity in space, time and frequency: Performance analysis and code design, *IEEE Trans. Wireless Commun.*, vol. 4, no. 4, pp. 1847-1857, Jul. 2005.
- [Xia526] W. Zhang, X.-G. Xia, and P. C. Ching, High-rate full-diversity spacetime-frequency codes for broadband MIMO block-fading channels, *IEEE Trans. Commun.*, vol. 55, pp. 25-34, Jan. 2007.
- [Zhang5] J.-K. Zhang, J. Liu, and K. M. Wong, Linear Toeplitz space time block codes, in *Proc. IEEE Int. Symp. Inf. Theory (ISIT05)*, Adelaide, Australia, Sep., 2005, pp. 1942-1946.
- [Shang5] Y. Shang and X.-G. Xia, A criterion and design for space-time block codes achieving full diversity with linear receivers, in *Proc. IEEE Int. Symp. Inf. Theory (ISIT07)*, Nice, France, Jun., 2007, pp. 2906-2910.
- [Shang51] Y. Shang and X.-G. Xia, Overlapped Alamouti codes, in *Proc. IEEE Global Commun. Conf. (Globecom07)*, Wash., DC, Nov. 26-30, 2007, pp. 2927-C2931.

- [Shang52] Y. Shang and X.-G. Xia, Space-time block codes achieving full diversity with linear receivers, *IEEE Trans. Inf. Theory*, vol. 54, no. 10, pp. 4528–4547, Oct. 2008.
- [Dai04] L. Dai, S. Sfar, and K. B. Letaief, An efficient detector for combined space-time coding and layered processing, *IEEE Trans. Commun.*, vol. 53, no. 9, pp. 1438–1442, Sept. 2005.
- [Zhang52] W. Zhang and X.-G. Xia, A systematic design of space-time block codes achieving full-diversity and partial interference cancellation group decoding, in *Proc. IEEE Globecom*, Hawaii, USA, Nov., 2009.
- [Bingham5] J. A. C. Bingham, Multi-carrier modulation for data transmission: An idea whose time has come, *IEEE Communications Magazine*, vol. 28, no. 5, pp. 5–14, May 1990.
- [Letaief99] K. B. Letaief and Y. Zhang, Dynamic multiuser resource allocation and adaptation for wireless systems, *IEEE Wireless Commun. Mag.*, vol. 13, no. 4, pp. 38–47, Aug. 2006.
- [Wang52] B. Lu and X. Wang, Space-time code design in OFDM systems, in *Proc. IEEE GLOBECOM*, San Francisco, CA, Nov./Dec. 2000, vol. 2, pp. 1000–1004.
- [Lu52] H. Bolcskei, M. Borgmann, and A. J. Paulraj, Space-frequency coded MIMO-OFDM with variable multiplexing-diversity tradeoff, in *Proc. IEEE ICC*, Anchorage, AK, May 2003, pp. 2837–2841.
- [Lu521] T. Kiran and B. S. Rajan, A systematic design of high-rate full diversity space frequency codes for MIMO-OFDM systems, in *Proc. IEEE ISIT*, 2005, pp. 2075–2079.
- [Lu522] W. Su, Z. Safar, M. Olfat, and K. J. R. Liu, Obtaining full-diversity space frequency codes from space-time codes via mapping, *IEEE Trans. Signal Process.*, vol. 51, no. 11, pp. 2905–2916, Nov. 2003.
- [Lu523] W. Su, Z. Safar, and K. J. R. Liu, Full-rate full-diversity space-frequency codes with optimum coding advantage, *IEEE Trans. Inf. Theory*, vol. 51, no. 1, pp. 229–249, Jan. 2005.
- [Lu524] X. Ma and G. B. Giannakis, Space-time-multipath coding using digital phase sweeping or circular delay diversity, *IEEE Trans. Signal Process.*, vol. 53, no. 3, pp. 1121–1131, Mar. 2005.
- [Lu525] L. Shao and S. Roy, Rate-one space-frequency block codes with maximum diversity for MIMO-OFDM, *IEEE Trans. Wireless Commun.*, vol. 4, no. 4, pp. 1674–1687, Jul. 2005.
- [Lu526] X. Ma and G. B. Giannakis, Full-diversity full-rate complex-field space-time coding, *IEEE Trans. Signal Process.*, vol. 51, no. 11, pp. 2917–2930, Nov. 2003.
- [Liu526] H.-F. Liu and M. C. Chiu, Constructions of asymptotically optimal space-frequency codes for MIMO-OFDM systems, *IEEE Trans. Inf. Theory*, vol. 53, no. 5, pp. 1676–1688, May 2007.
- [Sezginer526] S. Sezginer and H. Sari, Full-rate full-diversity  $2 \otimes 2$  space-time codes of reduced decoder complexity, *IEEE Commun. Lett.*, vol. 11, no. 12, pp. 973–975, Dec., 2007.
- [Sirianunpiboonr526] S. Sirianunpiboon, Y. Wu, A. R. Calderbank, and S. Howard, Fast optimal decoding of multiplexed orthogonal designs by conditional optimization, *IEEE Trans. Inform. Theory*, vol. 56, No. 3, pp. 1106–1113, Mar., 2010.
- [Sirianunpiboonr52011] S. Siwamogsatham, M. P. Fitz, and J. Grimm, A new view of performance analysis of transmit diversity schemes in correlated Rayleigh fading, *IEEE Trans. Inform. Theory*, vol. 48, pp. 950–956, Apr. 2002.
- [H00] R. W. Heath and A. J. Paulraj, Linear Dispersion Codes for MIMO Systems Based on Frame Theory, *IEEE Trans. Signal Process.*, Vol. 50, No. 10, pp. 2429–2441, Oct. 2002.
- [tner05] M. E. Gätner and H. Böcskei, Multiuser space-time/frequency code design, in *Proc. IEEE ISIT*, Seattle, WA, Jul. 2006, pp. 2819–2823.
- [Gallager85] R. G. Gallager, A perspective on multiaccess channels, *IEEE Trans. Inf. Theory*, vol. 31, no. 3, pp. 124–142, Mar. 1985.